




APP CRS	Rwy Ldg	<b>6003</b>
<b>360°</b>	TDZE	<b>213</b>
	Apt Elev	<b>213</b>

# RNAV (GPS) RWY 35

WEST MEMPHIS MUNI (A W M)

RNP APCH.	MISSED APPROACH: Climb to 2500 direct IMUDE and hold.
<p>▼ When local altimeter setting not received, use Frederick W Smith Intl altimeter setting; increase all MDA 60 feet, increase LNAV Cat C and D and Circling Cat C and D visibility ¼ SM. Rwy 35 helicopter visibility reduction below ¾ SM NA.</p>	

ASOS <b>118.175</b>	MEMPHIS APP CON <b>119.1 291.6</b>	CLNC DEL <b>121.7</b>	UNICOM <b>123.05</b> (CTAF) <b>📻</b>
------------------------	---------------------------------------	--------------------------	---

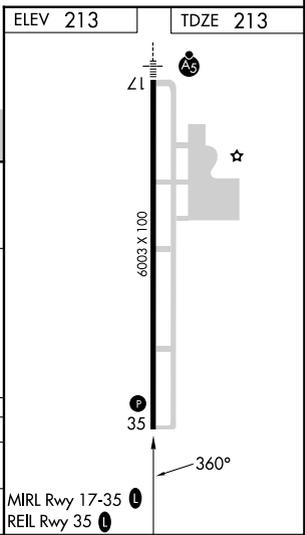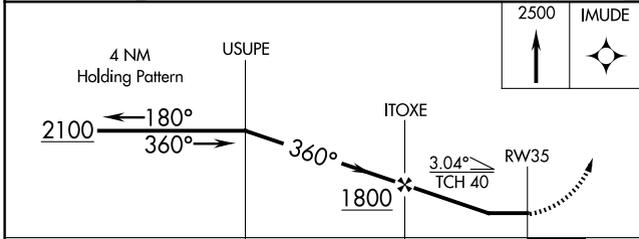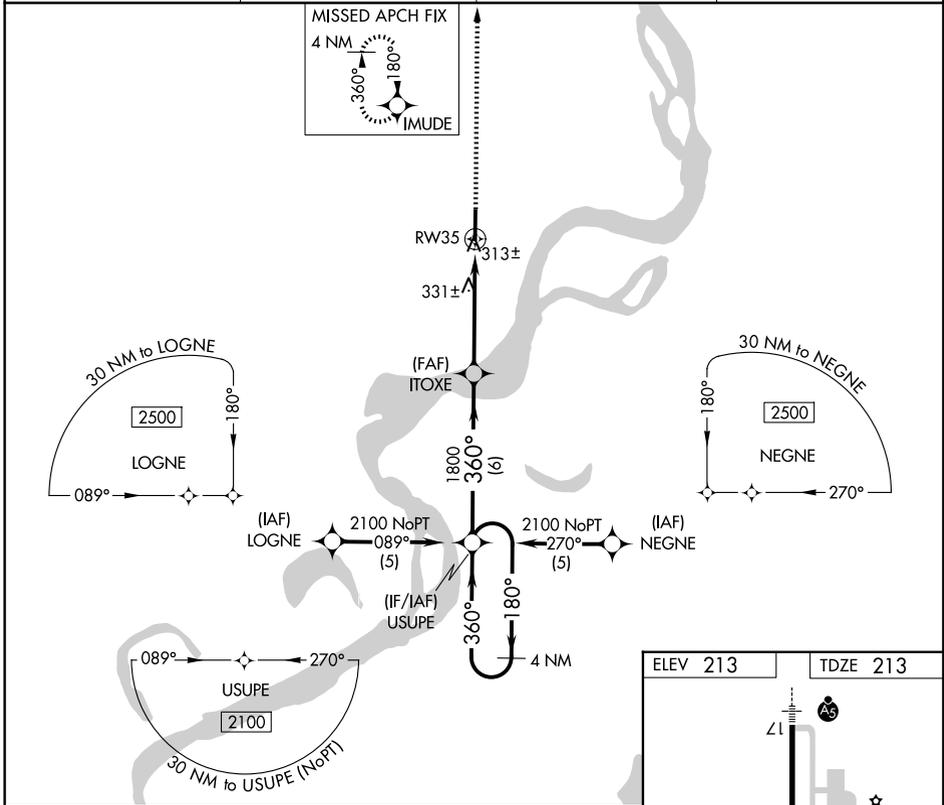

CATEGORY	A	B	C	D
LNAV MDA	600-1	387 (400-1)	600-1½ 387 (400-1½)	600-1¼ 387 (400-1¼)
CIRCLING	640-1 427 (500-1)	740-1 527 (600-1)	800-1½ 587 (600-1½)	920-2¼ 707 (800-2¼)

SC-1, 19 MAR 2026 to 16 APR 2026

SC-1, 19 MAR 2026 to 16 APR 2026