

WAAS CH <b>61114</b> <b>W08B</b>	APP CRS <b>079°</b>	Rwy Ldg TDZE Apt Elev	<b>7225</b> <b>462</b> <b>463</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 8R


SPIRIT OF ST LOUIS (SUS)

RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using STL altimeter setting. When local altimeter setting not received, use STL altimeter setting and increase LPV DA to 719 feet, increase LNAV/VNAV DA to 1186 feet, increase all MDA 60 feet, increase visibility LNAV/VNAV all Cats and LNAV Cats C/D 1/8 SM, and Circling Cat C 1/4 SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 2 1/2 SM and LNAV Cats C/D visibility to 1 1/8 SM. # RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using STL altimeter setting.


MALSR  MISSED APPROACH: Climb to 3000 direct HUGGE and right turn on track 175° to BNANA and right turn on track 272° to DERDF and hold.

ATIS <b>134.8</b>	ST. LOUIS APP CON <b>126.5 254.3</b>	SPIRIT TOWER* <b>124.75 (CTAF) 0 257.2</b>	GND CON <b>121.7</b>	CLNC DEL <b>133.1</b>	ST. LOUIS CLNC DEL <b>121.7</b> (when tower closed)	UNICOM <b>122.95</b>
----------------------	---	---	-------------------------	--------------------------	---	-------------------------

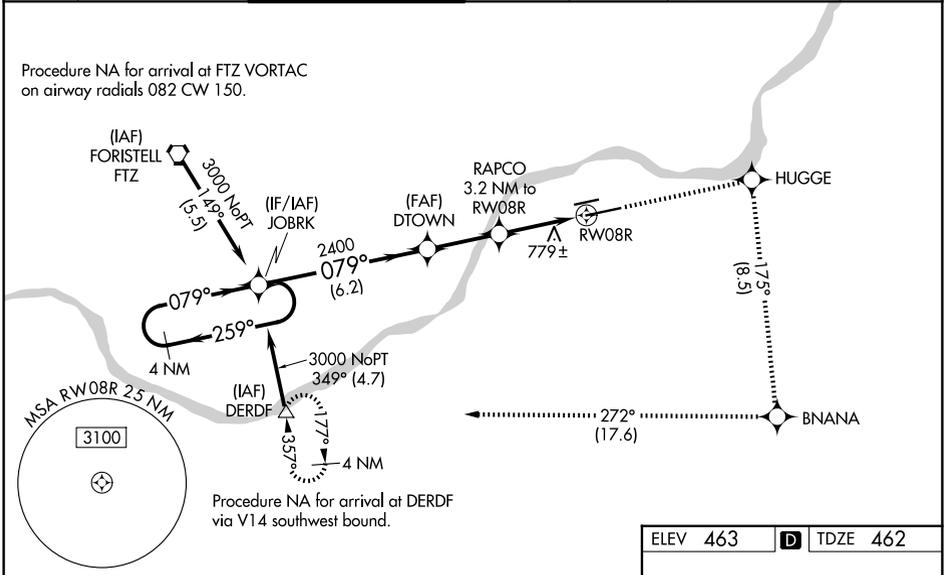

NC-3, 19 MAR 2026 to 16 APR 2026

NC-3, 19 MAR 2026 to 16 APR 2026

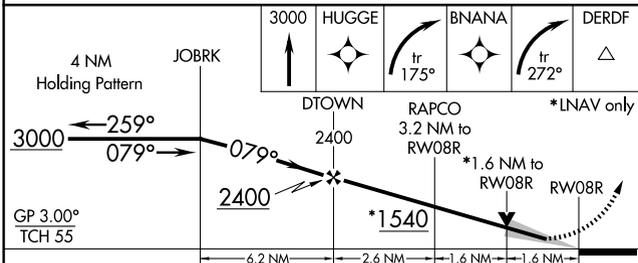

ELEV 463	<b>D</b> TDZE 462
----------	-------------------

MRL Rwy 8L-26R 

HIRL Rwy 8R-26L 

CATEGORY	A	B	C	D
LPV DA#		662/24	200 (200-1/2)	
LNAV/VNAV DA		1129-1 7/8	667 (700-1 7/8)	
LNAV MDA	1040/24	578 (600-1/2)	1040-1 1/4	578 (600-1 1/4)
CIRCLING	1100-1 637 (700-1)	1140-1 677 (700-1)	1180-2 717 (800-2)	1360-3 897 (900-3)