

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 87130 W35A | APP CRS 353° | Rwy Ldg TDZE Apt Elev | 5501 580 592 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 35


MC GREGOR EXEC (PWG)

RNP APCH - GPS.



ASR Baro-VNAV NA when using Waco Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Waco Rgnl altimeter setting and increase LPV DA to 861 feet; increase LNAV/VNAV DA to 861 feet; increase all MDAs 40 feet and LNAV visibility Cat B ¼ SM, and Circling visibility Cat B/C ¼ SM. Rwy 35 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2500 direct BLDEE and on track 018° to ACT VORTAC and hold.

| | | |
|----------------------------|--------------------------------------|--------------------------------|
| AWOS-3PT 135.525 | WACO APP CON★ 127.65 352.0 | UNICOM 123.05 (CTAF) |
|----------------------------|--------------------------------------|--------------------------------|

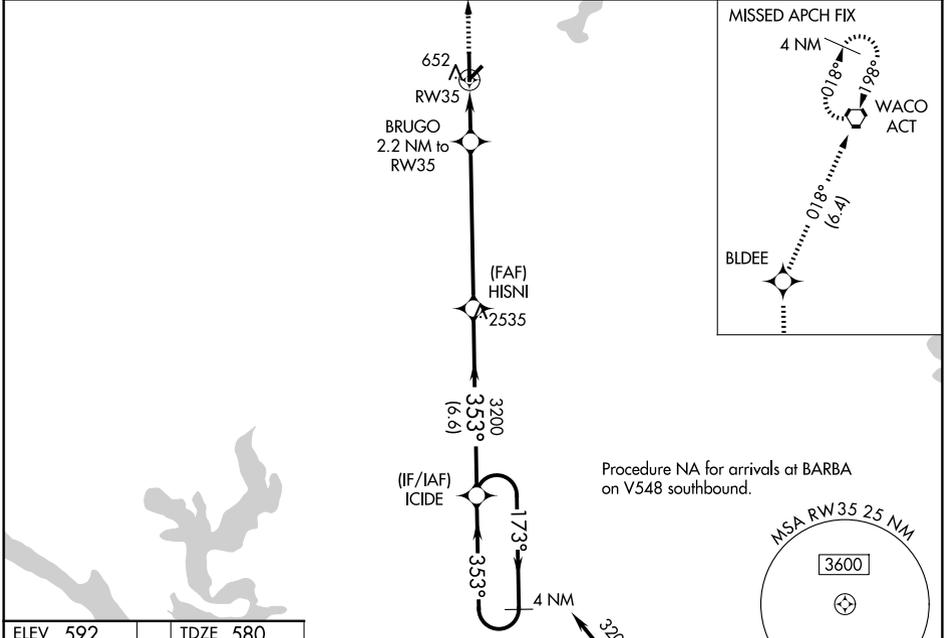

| | |
|----------|----------|
| ELEV 592 | TDZE 580 |
|----------|----------|

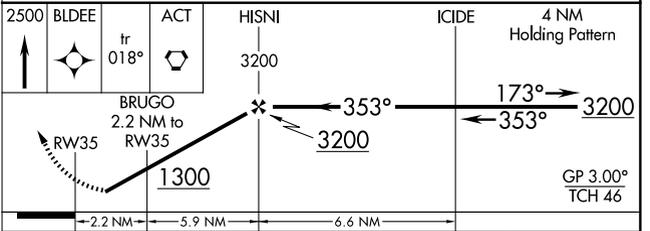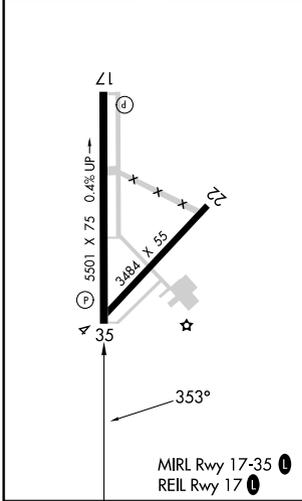

| CATEGORY | A | B | C | D |
|--------------|-----------------------|-----------------------|------------------------|----|
| LPV DA | 830-¾ | 250 (300-¾) | | NA |
| LNAV/VNAV DA | 830-¾ | 250 (300-¾) | | NA |
| LNAV MDA | 960-1 | 380 (400-1) | 960-1⅛ 380 (400-1⅛) | NA |
| CIRCLING | 1020-1 428 (500-1) | 1060-1 468 (500-1) | 1300-2 708 (800-2) | NA |

SC-3, 19 MAR 2026 to 16 APR 2026

SC-3, 19 MAR 2026 to 16 APR 2026