

LOC I-UCY 109.7	APP CRS 006°	Rwy Ldg 6503 TDZE 346 Apt Elev 346
---------------------------	------------------------	---

ILS or LOC RWY 1

EVERETT-STEWART RGNL (UCY)

NA ADF required. When local altimeter setting not received, use Dyersburg altimeter setting and increase all DA 72 feet and all MDA 80 feet, increase S-LOC 1 Cat C/D visibility to 1³/₈ mile, Circling Cat C visibility to 1³/₈ mile and Circling Cat D visibility to 2¹/₂ mile. Inop table does not apply to S-ILS 1. For inop ODALS, increase S-LOC 1 Cat C/D visibility to 1³/₈ mile. For inop ODALS when using Dyersburg altimeter setting, increase S-ILS 1 all Cats visibility to ⁷/₈ mile and S-LOC 1 Cat D visibility to 1³/₈ mile.

ODALS





MISSED APPROACH:
Climb to 1300 then climbing right turn to 2500 direct OBION LOM and hold.

AWOS-3
135,325

MEMPHIS CENTER
133.65 292.15



UNICOM
122.7 (CTAF)

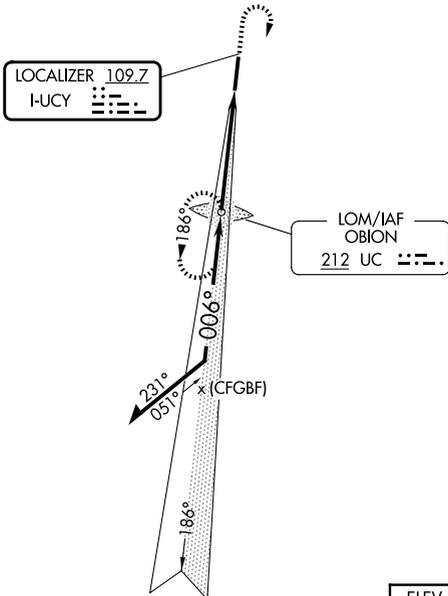

SE-1, 19 MAR 2026 to 16 APR 2026

SE-1, 19 MAR 2026 to 16 APR 2026

ADF and RADAR REQUIRED

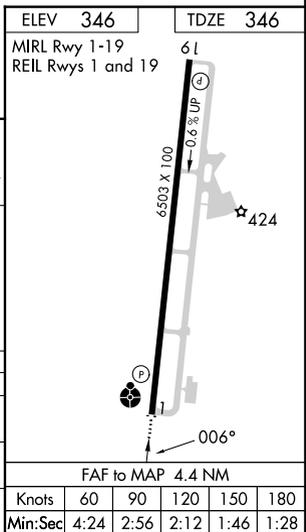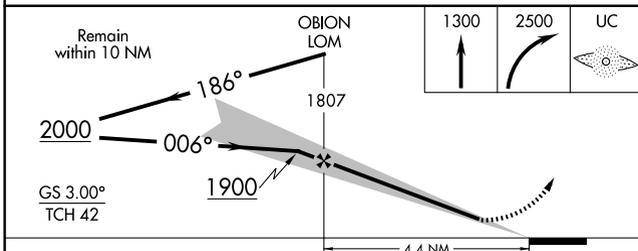

CATEGORY	A	B	C	D
S-ILS 1		546- ³ / ₄	200 (200- ³ / ₄)	
S-LOC 1	820- ³ / ₄	474 (500- ³ / ₄)	820-1 ¹ / ₄	474 (500-1 ¹ / ₄)
CIRCLING	820-1	474 (500-1)	820-1 ¹ / ₂	1020-2 ¹ / ₄ 474 (500-1 ¹ / ₂) 674 (700-2 ¹ / ₄)