

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 58030 W14A | APP CRS 141° | Rwy Idg TDZE Apt Elev | 3999 1034 1034 |
|--|------------------------|-----------------------------|---|


RNAV (GPS) RWY 14

MONTEVIDEO-CHIPPEWA COUNTY (MVE)


⚠ Baro-VNAV NA when using Granite Falls altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -30°C (-22°F) or above 54°C (130°F). When local altimeter setting not received, use Granite Falls altimeter setting and increase LPV DA to 1320 feet; increase LNAV/VNAV DA to 1320 feet; increase all MDAs 40 feet and LNAV visibility Cats C/D ½ SM and Circling visibility Cats C/D ¼ SM. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When VGSi inop, Straight-in and Circling Rwy 14 procedures NA at night. Circling to Rwy 3-21 NA.

MISSED APPROACH:
Climb to 3300 direct YIBUG and hold.


| | | |
|----------------------------|--|---------------------------------|
| AWOS-3PT 119.675 | MINNEAPOLIS CENTER 125.5 323.1 | UNICOM 122.8 (CTAF) 0 |
|----------------------------|--|---------------------------------|

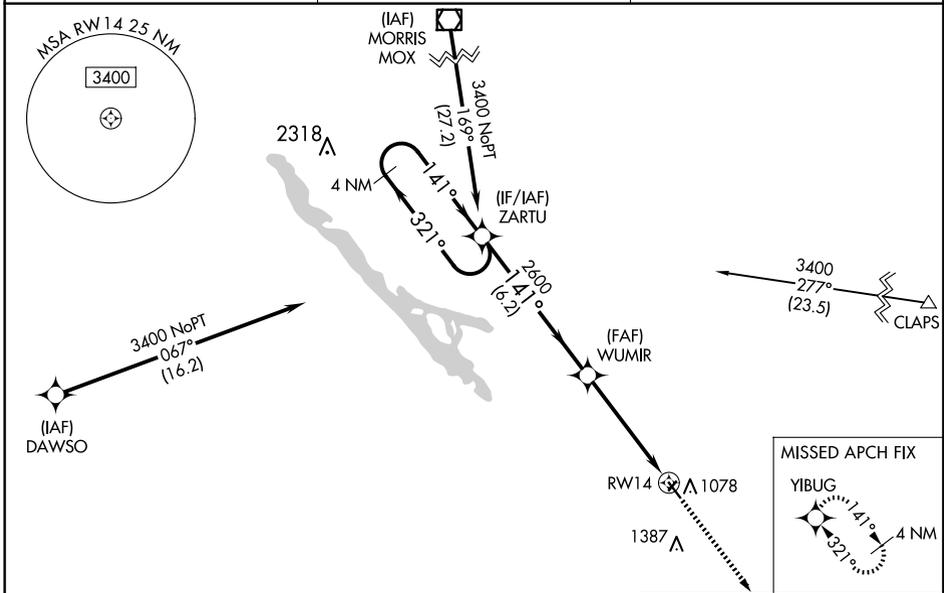

| | |
|-----------|-----------|
| ELEV 1034 | TDZE 1034 |
|-----------|-----------|

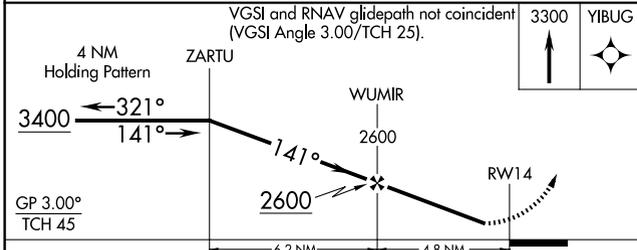

| CATEGORY | A | B | C | D |
|--------------|--------------------|--------|----------------------|--------------------|
| LPV DA | | 1284-1 | 250 (300-1) | |
| LNAV/VNAV DA | | 1284-1 | 250 (300-1) | |
| LNAV MDA | 1520-1 486 (500-1) | | 1520-1¾ 486 (500-1¾) | |
| CIRCLING | 1560-1 526 (600-1) | | 1700-1¾ 666 (700-1¾) | 1700-2 666 (700-2) |

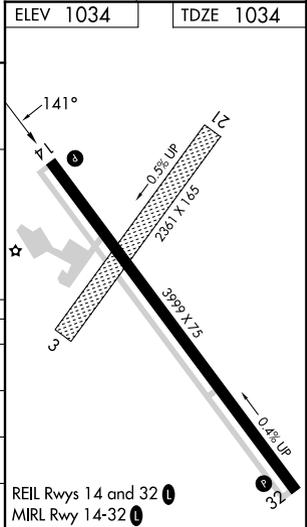

NC-1, 19 MAR 2026 to 16 APR 2026

NC-1, 19 MAR 2026 to 16 APR 2026