

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 72713 W27A | APP CRS 268° | Rwy Ldg TDZE Apt Elev | 5100 925 926 |
|--|------------------------|-----------------------------|---|


RNAV (GPS) RWY 27

NORTHEAST OHIO RGNL (HZY)



▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2800 direct NOJWE and hold.

| | | | |
|------------------------|-----------------------------------|-------------------------------|-----------------------|
| ASOS 127.025 | BUFFALO APP CON * 121.0 | UNICOM 122.8 (CTAF) | 123.3 0 |
|------------------------|-----------------------------------|-------------------------------|-----------------------|

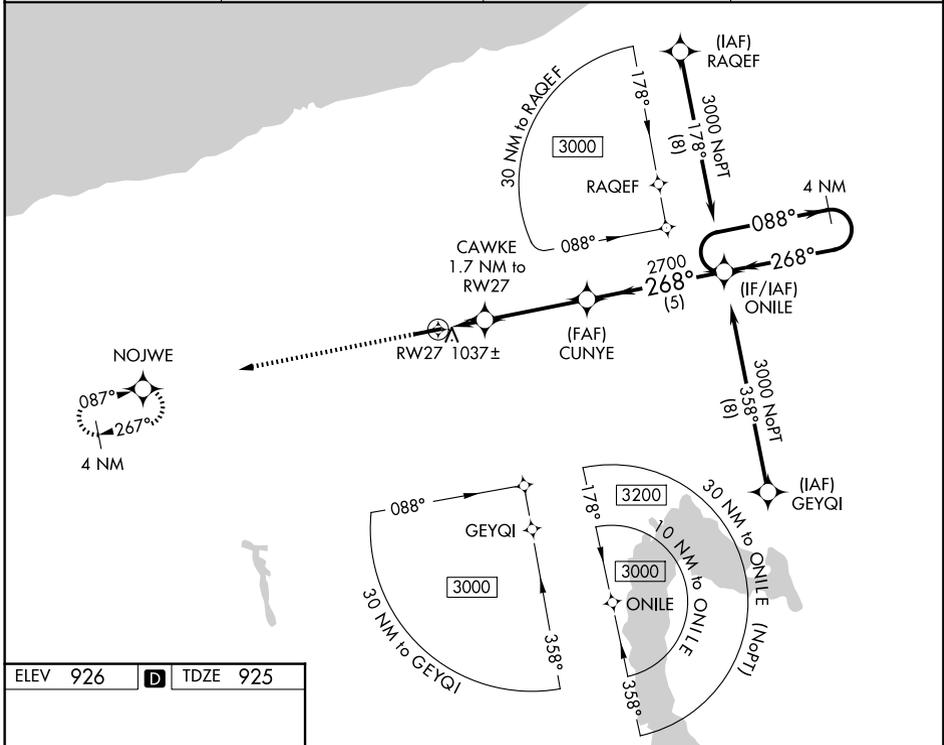

| | | |
|----------|----------|----------|
| ELEV 926 | D | TDZE 925 |
|----------|----------|----------|

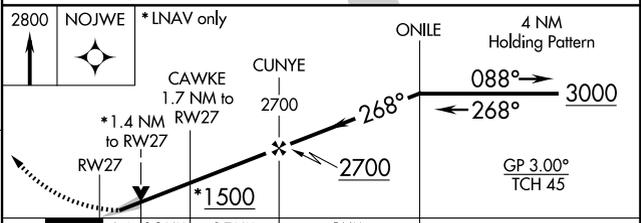

| CATEGORY | A | B | C | D |
|--------------|-----------------------|-----------------------|-------------------------------|-----------------------|
| LPV DA | | 1184-7/8 | 259 (300-7/8) | |
| LNAV/VNAV DA | | 1198-7/8 | 273 (300-7/8) | |
| LNAV MDA | | 1300-1 | 375 (400-1) | |
| CIRCLING | 1340-1 414 (500-1) | 1380-1 454 (500-1) | 1500-1 1/2 574 (600-1 1/2) | 1580-2 654 (700-2) |