

| | | | |
|--|------------------------|---|-------------|
| WAAS CH 60903 W28A | APP CRS 285° | Rwy Ldg TDZE 967 Apt Elev 968 | 6453 |
|--|------------------------|---|-------------|

RNAV (GPS) RWY 28


STATESVILLE RGNL (SVH)

RNP APCH - GPS.



▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
 ▲ When local altimeter setting not received, use Lincolnton altimeter setting and increase LPV DA to 1218, LNAV/VNAV DA to 1269, and all MDA 60 feet; increase LNAV/VNAV all Cats and LNAV Cats C/D visibility 1/8, and Circling Cat C 1/4 mile. VDP and Baro-VNAV NA when using Lincolnton altimeter setting. For inop MALSRL, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility to 2/8 mile. For inop MALSRL when using Lincolnton altimeter setting, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility to 1 mile.

MALSRL MISSED APPROACH: Climb to 1380 then climbing right turn to 3400 direct SANFI and hold.

| | | |
|--------------------------|---------------------------------------|-----------------------------------|
| AWOS-3 119.225 | ATLANTA CENTER 125.15 263.0 | UNICOM 123.075 (CTAF) 1 |
|--------------------------|---------------------------------------|-----------------------------------|

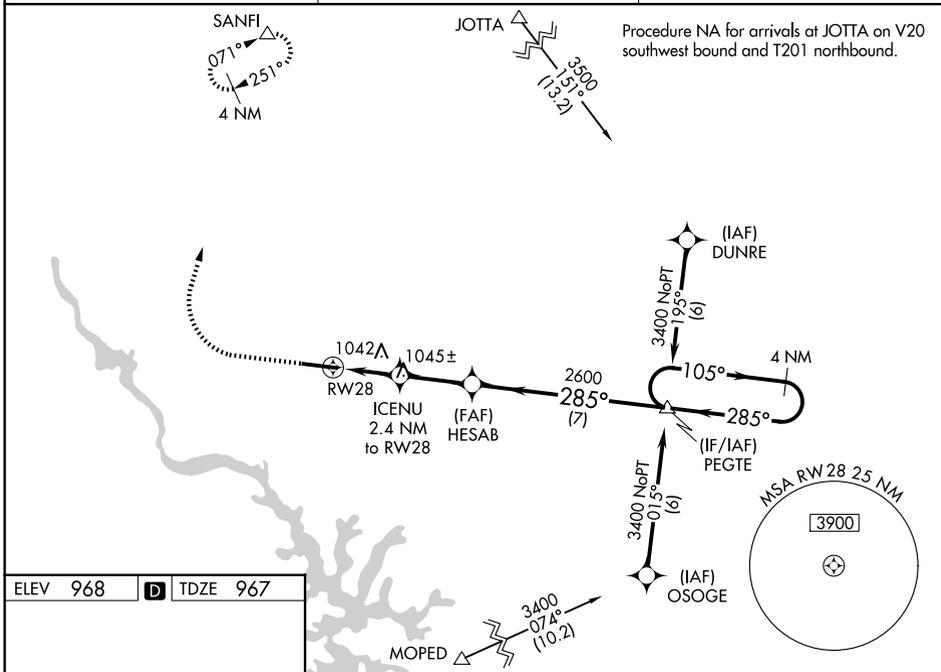

| | | |
|----------|----------|----------|
| ELEV 968 | D | TDZE 967 |
|----------|----------|----------|

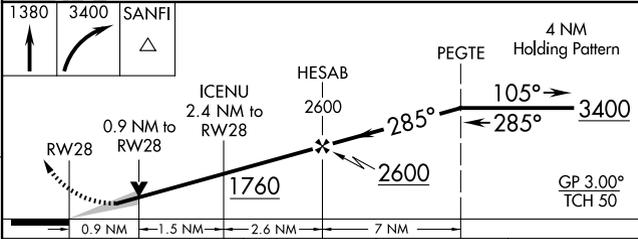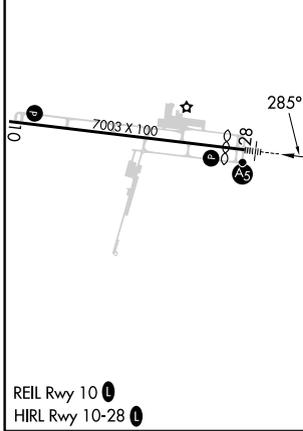

| CATEGORY | A | B | C | D |
|--------------|-------------|-------------|-----------------|-------------|
| LPV DA | | 1167-3/4 | 200 (200-3/4) | |
| LNAV/VNAV DA | | 1218-3/4 | 251 (300-3/4) | |
| LNAV MDA | | 1300-3/4 | 333 (400-3/4) | |
| CIRCLING | 1420-1 | 1540-1 | 1540-1 1/2 | 1560-2 |
| | 452 (500-1) | 572 (600-1) | 572 (600-1 1/2) | 592 (600-2) |

SE-2, 19 MAR 2026 to 16 APR 2026

SE-2, 19 MAR 2026 to 16 APR 2026