


WAAS CH 40339 W35A	APP CRS 350°	Rwy Ldg TDZE Apt Elev	10001 5885 5885
--	------------------------	-----------------------------	--

RNAV (GPS) RWY 35R



CENTENNIAL (APA)

RNP APCH.		CENTENNIAL TOWER 118.9		GND CON 121.8		CLNC DEL 128.6	
<p>▼ Circling Rwy 35L NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS, increase LNAV Cats C/D visibility to 1 3/8 SM.</p> <p>▲</p>		<p>MALSRL</p> 		<p>MISSED APPROACH: (Do not exceed 240K until BPUTN) Climb to 8200 then climbing left turn to 9600 direct BPUTN and hold.</p>			

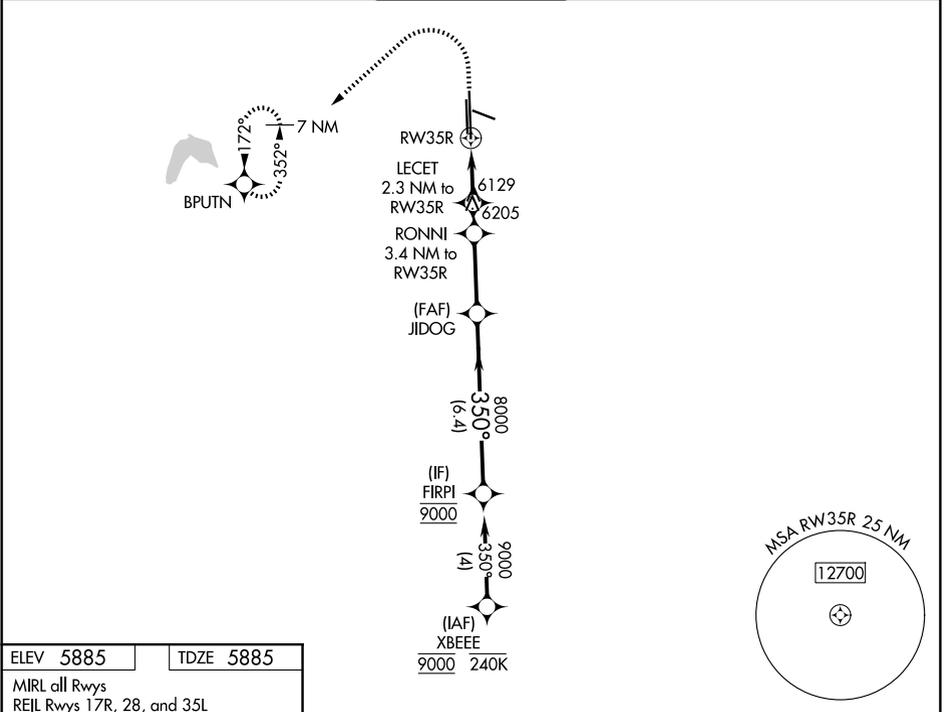

ELEV 5885	TDZE 5885
-----------	-----------

MIRL all Rwys
REIL Rwys 17R, 28, and 35L

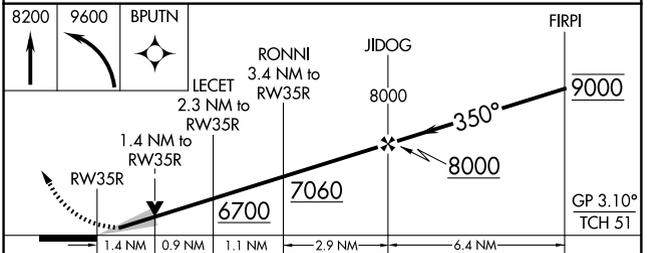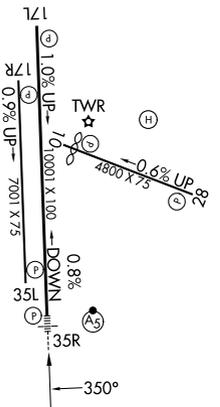

CATEGORY	A	B	C	D
LPV DA		6085-1/2	200 (200-1/2)	
LNAV/VNAV DA		6324-3/4	439 (500-3/4)	
LNAV MDA	6380-1/2	495 (500-1/2)	6380-1	495 (500-1)
CIRCLING	6400-1	6540-1	6740-2 1/2	6760-2 3/4
	515 (600-1)	655 (700-1)	855 (900-2 1/2)	875 (900-2 3/4)