

| | | | |
|--|------------------------|---|-------------|
| WAAS CH 72619 W18A | APP CRS 183° | Rwy Ldg TDZE 173 Apt Elev 173 | 5404 |
|--|------------------------|---|-------------|

RNAV (GPS) RWY 18


FLETCHER FLD (CKM)

RNP APCH-GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using Tunica altimeter setting. When local altimeter setting not received, use Tunica altimeter setting: increase LPV DA to 483 feet, LNAV/VNAV DA to 647 feet and all MDA 60 feet; increase LPV all Cats visibility 1/8 SM, LNAV/VNAV all Cats visibility 1/4 SM, and LNAV Cat C/D visibility 1/8 SM. Circling Rwy 36 NA at night.

MISSED APPROACH:
Climb to 2000 direct HULON and hold.


| | | |
|--------------------------|--------------------------------------|---------------------------------|
| AWOS-3 120.675 | MEMPHIS CENTER 135.3 335.8 | UNICOM 122.8 (CTAF) 0 |
|--------------------------|--------------------------------------|---------------------------------|

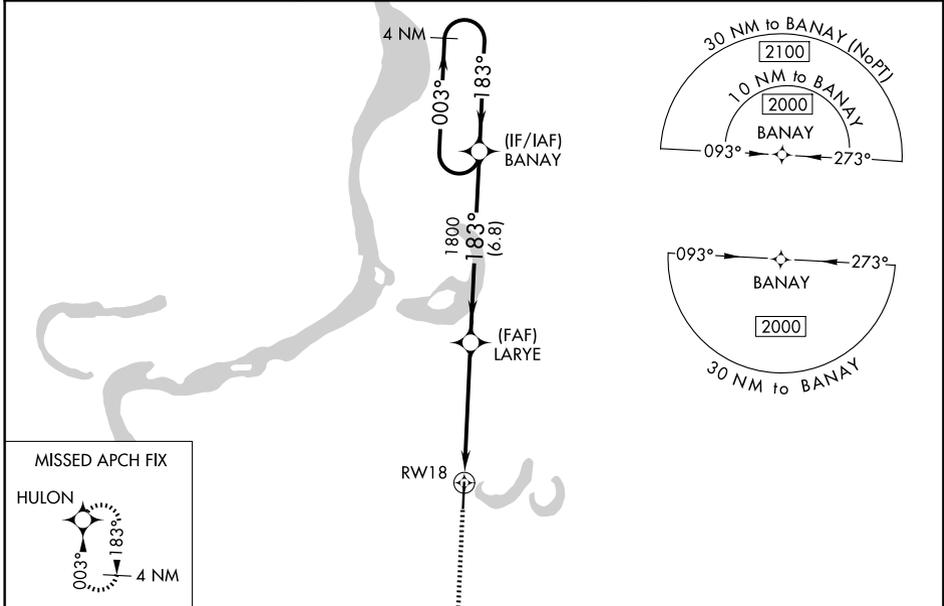


SC-4, 19 MAR 2026 to 16 APR 2026

SC-4, 19 MAR 2026 to 16 APR 2026

| | |
|-----------------|-----------------|
| ELEV 173 | TDZE 173 |
|-----------------|-----------------|

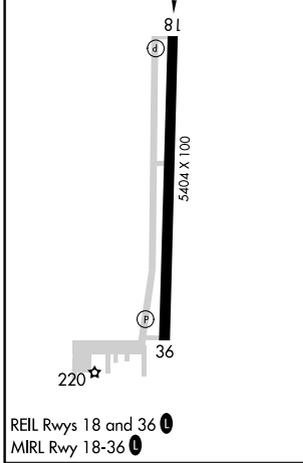

REIL Rwy 18 and 36 **0**
MIRL Rwy 18-36 **0**

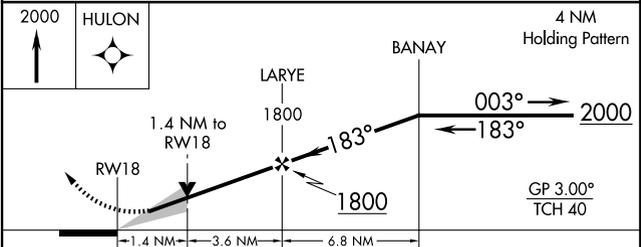

| CATEGORY | A | B | C | D |
|--------------|-------|-------------|----------------------------|----------------------|
| LPV DA | | 423-7/8 | 250 (300-7/8) | |
| LNAV/VNAV DA | | 587-13/8 | 414 (500-13/8) | |
| LNAV MDA | 640-1 | 467 (500-1) | 640-13/8 | 467 (500-13/8) |
| CIRCLING | 740-1 | 567 (600-1) | 780-13/4 607 (700-13/4) | 780-2 607 (700-2) |