

WAAS CH 70423 W35A	APP CRS 352°	Rwy Ldg 4305 TDZE 1616 Apt Elev 1616
--	------------------------	---


RNAV (GPS) RWY 35

CLINTON RGNL (CLK)

⚠ DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). Circling NA to Rwy 13 and 31. When local altimeter setting not received, use Weatherford altimeter setting; Increase DA to 1902 and all visibilities ½ mile; increase all MDA 40 feet and visibility Cat C ¼ mile. Baro-VNAV and VDP NA when using Weatherford altimeter setting.

MISSED APPROACH: Climb to 2400 then climbing left turn to 4000 direct OSUCU and hold.

AWOS-3 119.225	FORT WORTH CENTER 128.4 269.37	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

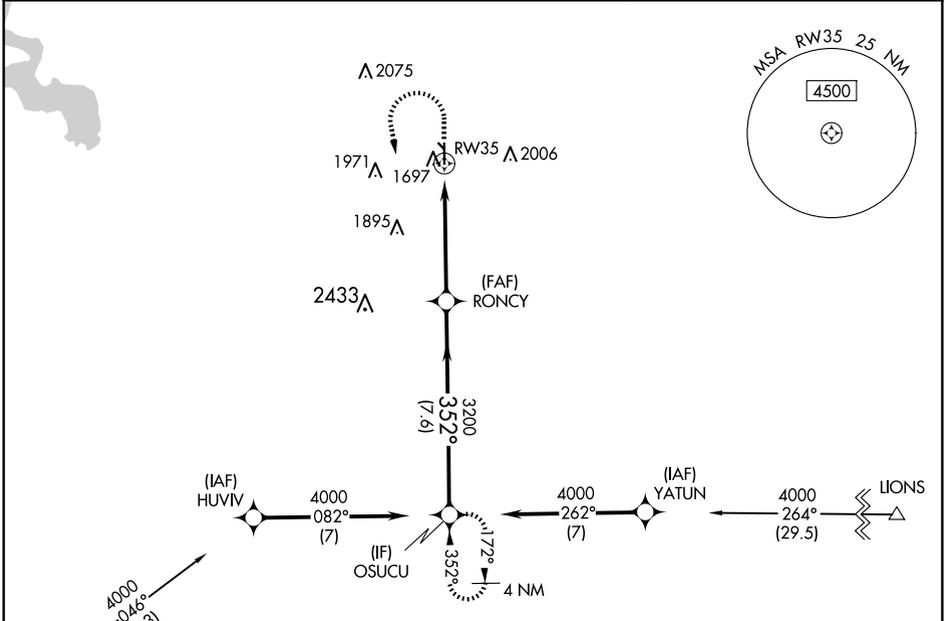

SC-1, 19 MAR 2026 to 16 APR 2026

SC-1, 19 MAR 2026 to 16 APR 2026

BURNS FLAT BFV Procedure NA for arrival on BFV VORTAC airway radials 055 CW 098.

2400	4000	OSUCU	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 40).		OSUCU
*LNAV only.		*1.3 NM to RW35	RONCY	3200	4000
RW35		1.3 NM	3.6 NM	7.6 NM	GP 3.00° TCH 40
CATEGORY	A	B	C	D	
LPV DA	1866-7/8		250 (300-7/8)	NA	
LNAV/VNAV DA	1870-7/8		254 (300-7/8)	NA	
LNAV MDA	2040-1 424 (500-1)		2040-1 1/4 424 (500-1 1/4)	NA	
C CIRCLING	2100-1 484 (500-1)	2220-1 604 (700-1)	2320-2 704 (800-2)	NA	

