

WAAS CH 58112 W05A	APP CRS 050°	Rwy Ldg TDZE 123 Apt Elev 125	5001
--	------------------------	---	-------------

RNAV (GPS) RWY 5





BARTOW EXEC (BOW)

RNP APCH - GPS.

▼ Rwy 5 helicopter visibility reduction below ¼ SM NA. Baro-VNAV and VDP NA when using TPA altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use TPA altimeter setting and increase LPV DA to 556 feet, LNAV/VNAV DA to 618 feet and LNAV MDA 120 feet. Increase LPV and LNAV/VNAV all Cats visibility and LNAV Cat C/D visibility ¼ SM.

MISSED APPROACH:
Climb to 2300 direct
ZOMOV and hold.

AWOS-3 123.775	TAMPA APP CON 120.65 290.3	BARTOW TOWER ★ 121.20 (CTAF)	GND CON 121.9	UNICOM 122.95
--------------------------	--------------------------------------	---	-------------------------	-------------------------

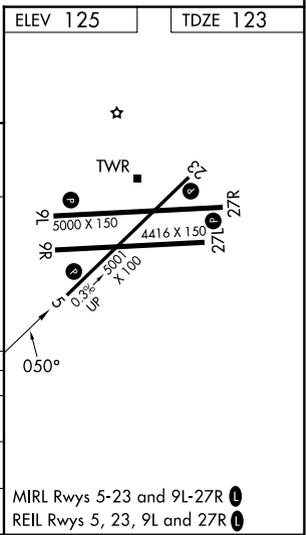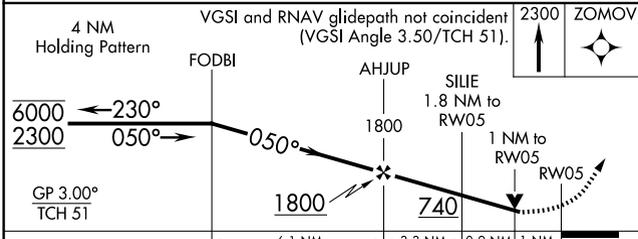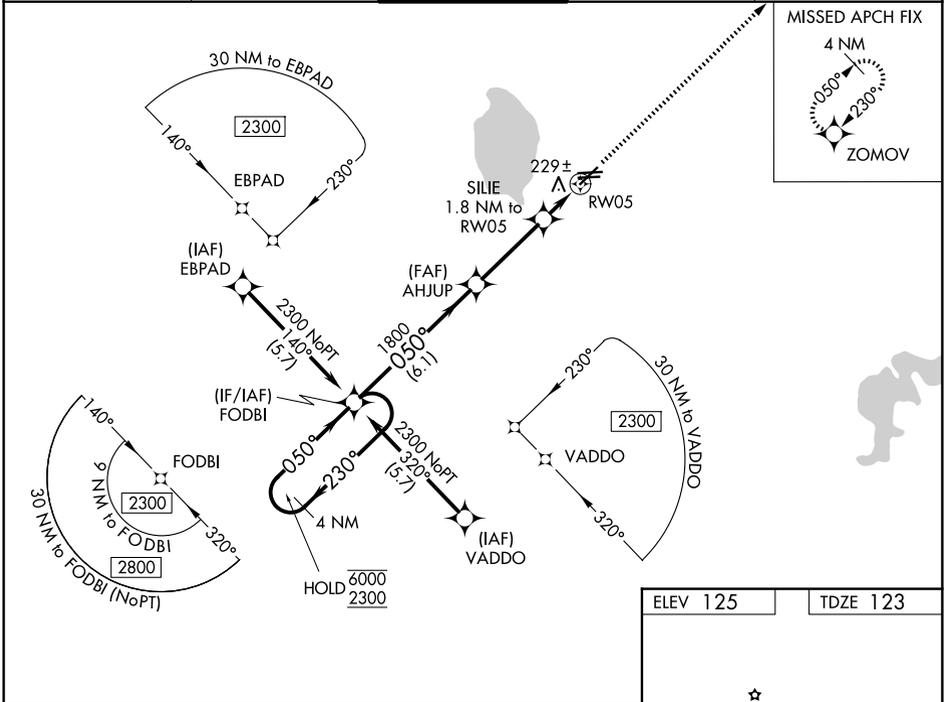

CATEGORY	A	B	C	D
LPV DA	447-1		324 (400-1)	
LNAV/VNAV DA	509-1½		386 (400-1½)	
LNAV MDA	520-1	397 (400-1)	520-1½	397 (400-1½)

SE-3, 19 MAR 2026 to 16 APR 2026

SE-3, 19 MAR 2026 to 16 APR 2026