

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 63203 W18A | APP CRS 182° | Rwy Ldg TDZE Apt Elev | 8003 264 264 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 18

GOLDEN TRIANGLE RGNL (GTR)


RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LPV Cat E visibility to 3/4 SM, LNAV/VNAV Cat E to 1 1/2 SM, and LNAV Cat C/D/E to 1 1/2 SM.





MISSED APPROACH:
Climb to 800 then climbing right turn to 3000 direct HUYKA and hold, continue climb-in-hold to 3000.

| | | | | |
|------------------------|---|---|-----------------------------------|-------------------------|
| ATIS 126.375 | COLUMBUS APP CON* 135.6 323.275 | GOLDEN TRIANGLE TOWER* 118.2 (CTAF) 298.875 | GND CON 135.375 322.475 | UNICOM 122.95 |
|------------------------|---|---|-----------------------------------|-------------------------|

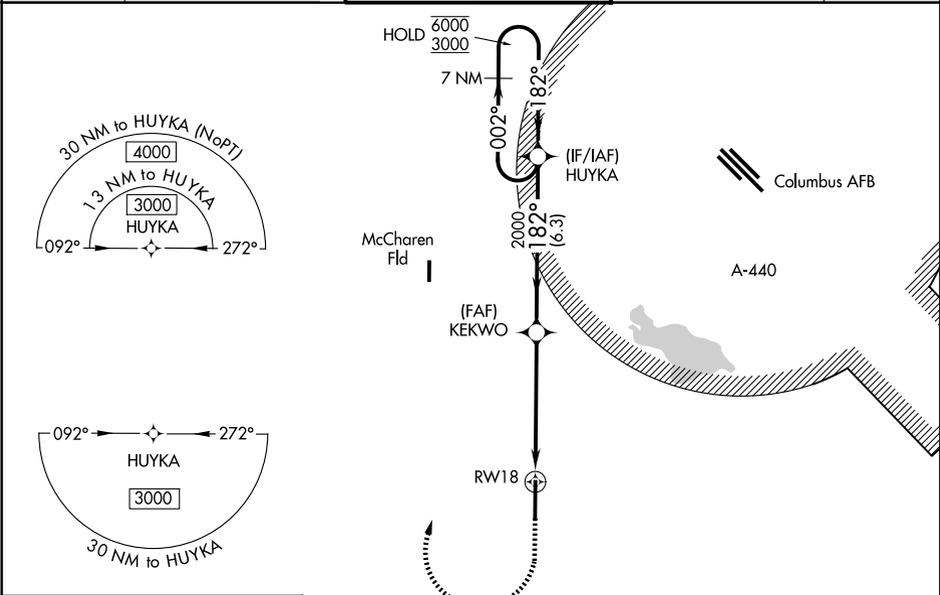

SC-4, 19 MAR 2026 to 16 APR 2026

SC-4, 19 MAR 2026 to 16 APR 2026

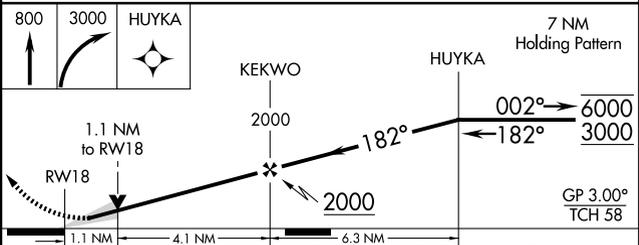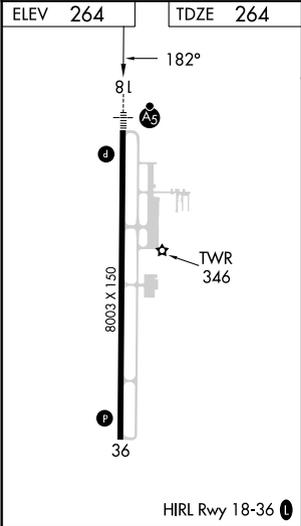

| CATEGORY | A | B | C | D | E |
|--------------|---------|---------------|----------------------|------------------------------|------------------------------|
| LPV DA | | 464-1/2 | 200 (200-1/2) | | |
| LNAV/VNAV DA | | 710-7/8 | 446 (500-7/8) | | |
| LNAV MDA | 680-1/2 | 416 (500-1/2) | 680-3/4 | 416 (500-3/4) | |
| CIRCLING | 760-1 | 496 (500-1) | 960-2 696 (700-2) | 960-2 1/4 696 (700-2 1/4) | 960-2 1/2 696 (700-2 1/2) |