

WAAS CH <b>56238</b> <b>W28A</b>	APP CRS <b>276°</b>	Rwy Ldg TDZE Apt Elev	<b>5004</b> <b>975</b> <b>994</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 28




ROBEN-HOOD (RQB)

RNP APCH - GPS.

**⚠** Rwy 28 helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using MKG altimeter setting. When local altimeter setting not received, use MKG altimeter setting; increase LPV DA to 1383 feet and all visibilities 1/2 SM; increase LNAV/VNAV DA to 1598 feet and all visibilities 3/8 SM; increase all MDAs 160 feet.

MISSED APPROACH: Climb to 3000 direct JADIT and hold.

AWOS-3P <b>125.875</b>	MINNEAPOLIS CENTER <b>120.85 322.35</b>	UNICOM <b>122.8 (CTAF) 0</b>
---------------------------	--	---------------------------------

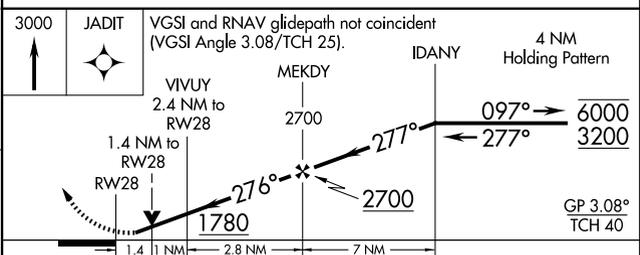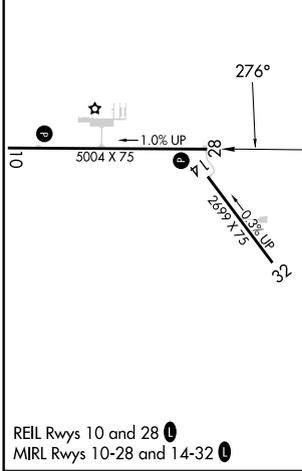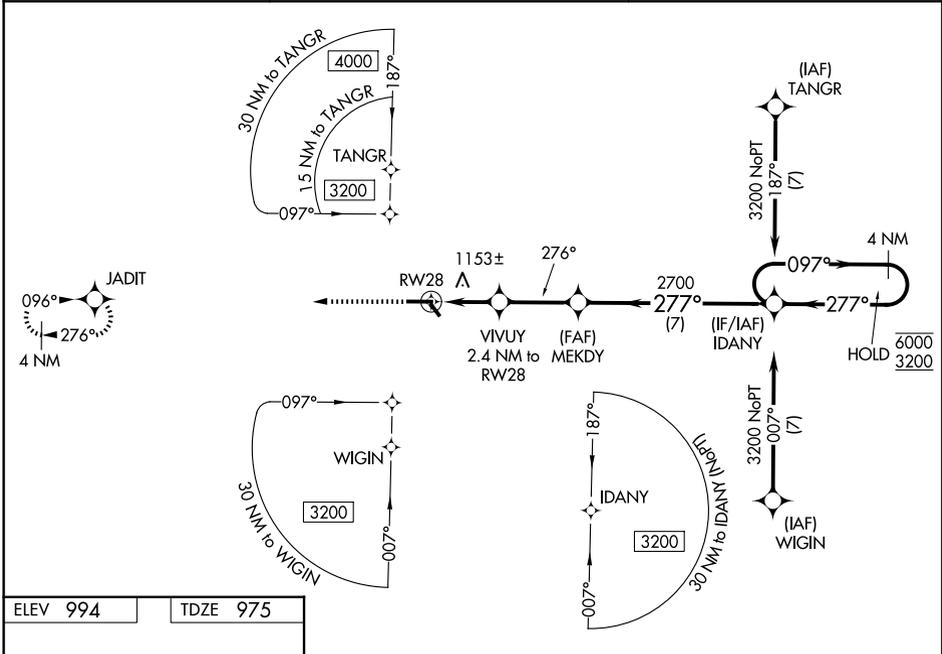

CATEGORY	A	B	C	D
LPV DA	1225-1	250 (300-1)		NA
LNAV/VNAV DA	1440-1 <sup>3/8</sup>	465 (500-1 <sup>3/8</sup> )		NA
LNAV MDA	1440-1	465 (500-1)		NA
CIRCLING	1520-1 526 (600-1)	1560-1 566 (600-1)		NA

EC-1, 19 MAR 2026 to 16 APR 2026

EC-1, 19 MAR 2026 to 16 APR 2026