

WAAS CH <b>82041</b> <b>W10A</b>	APP CRS <b>096°</b>	Rwy Ldg TDZE Apt Elev	<b>4201</b> <b>1089</b> <b>1090</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 10

NEW CASTLE HENRY COUNTY MARLATT FLD (UWL)

RNP APCH - GPS.



**⚠** Rwy 10 helicopter visibility reduction below  $\frac{3}{4}$  SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using AID altimeter setting. When local altimeter setting not received, use AID altimeter setting and increase LPV DA to 1408 feet; increase LNAV/VNAV DA to 1424 feet; increase all MDAs 80 feet and LNAV visibility Cats C and D  $\frac{3}{8}$  SM, and Circling visibility Cats C and D  $\frac{1}{2}$  SM.

**MISSED APPROACH:**  
Climb to 3000 direct TASUY and hold.



AWOS-3  
**132.375**

INDIANAPOLIS APP CON  
**135.45 317.8**

UNICOM  
**123.05 (CTAF) 0**

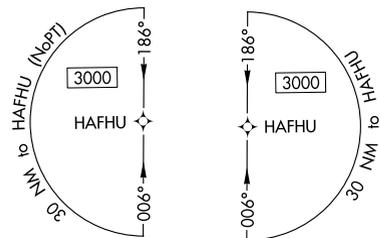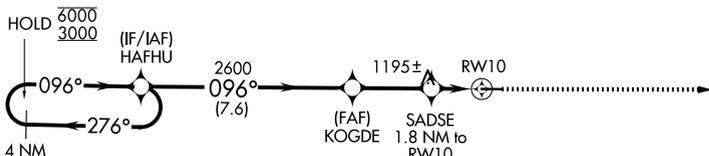

ELEV 1090 | TDZE 1089

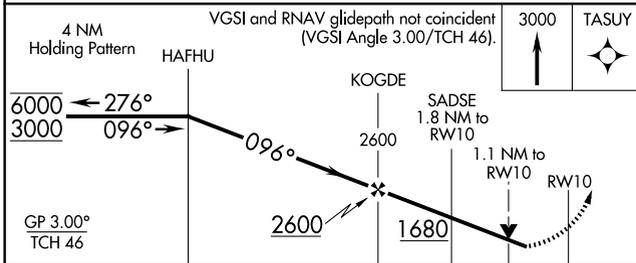

CATEGORY	A	B	C	D
LPV DA		1339-1	250 (300-1)	
LNAV/VNAV DA		1355-1	266 (300-1)	
LNAV MDA		1460-1	371 (400-1)	
CIRCLING	1520-1 430 (500-1)	1540-1 450 (500-1)	1760-1 $\frac{3}{4}$ 670 (700-1 $\frac{3}{4}$ )	1760-2 670 (700-2)

MIRL Rwy 10-28 0  
REIL Rwy 10 and 28 0