

| | | |
|--|------------------------|---|
| WAAS CH 53708 W13A | APP CRS 130° | Rwy Ldg 8001 TDZE 18 Apt Elev 19 |
|--|------------------------|---|

RNAV (GPS) RWY 13



CAMERON COUNTY (PIL)

RNP APCH.

Baro-VNAV NA when using Brownsville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP NA when using Brownsville altimeter setting. When local altimeter setting not received, use Brownsville altimeter setting and increase all DA 38 feet and all MDA 40 feet, increase LPV all Cats, LNAV Cat C, and Circling Cat C visibility ¼ mile. Circling Rwy 3, 8, 17, 21, 26, 35 NA at night.

MISSED APPROACH: Climb to 3000 direct COKAX and via 185° track to CHICO and hold.

| | | | |
|------------------------|--------------------------------------|--------------------------|-------------------------------|
| ASOS 118.525 | VALLEY APP CON 119.5 257.6 | CLNC DEL 119.2 | UNICOM 122.8 (CTAF) |
|------------------------|--------------------------------------|--------------------------|-------------------------------|

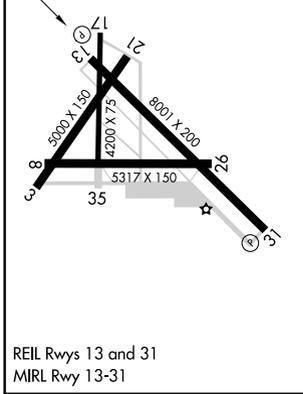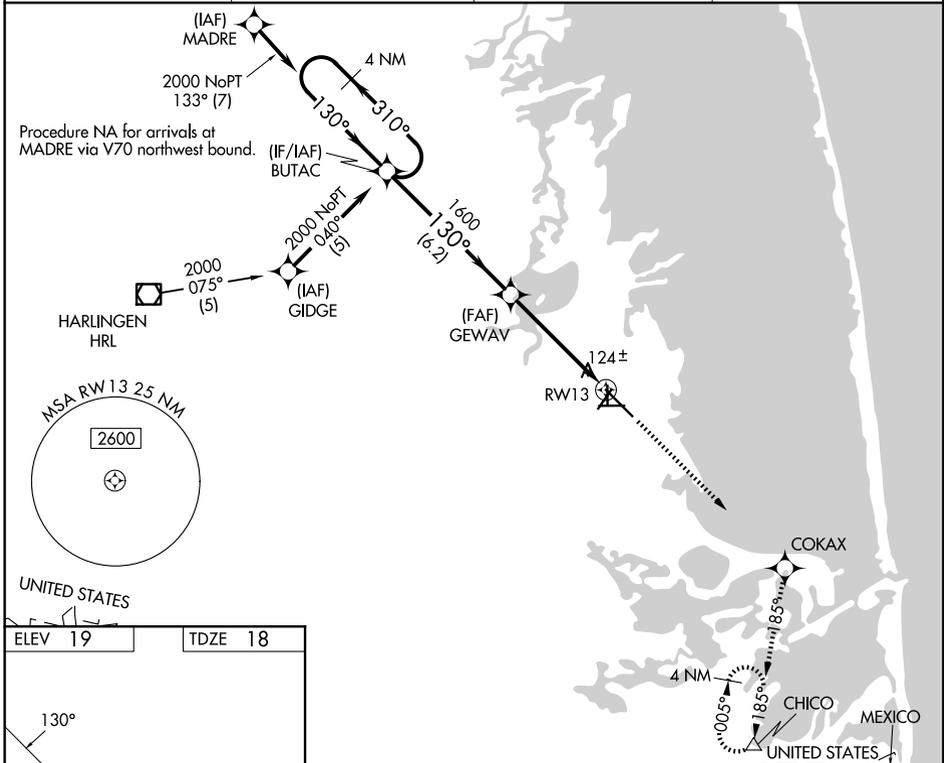

| | | | | |
|--|----------------------|----------------------|------------------------|----|
| ELEV 19 | TDZE 18 | | | |
| <p>3000 COKAX ↑</p> <p>CHICO tr 185°</p> <p>*2.1 NM to RWY 13</p> <p>*LNAV only.</p> | | | | |
| CATEGORY | A | B | C | D |
| LPV DA | 376-1¼ | 358 (400-1¼) | | NA |
| LNAV/VNAV DA | 424-1½ | 406 (500-1½) | | NA |
| LNAV MDA | 480-1 | 462 (500-1) | 480-1¼ 462 (500-1¼) | NA |
| CIRCLING | 540-1 521 (600-1) | 620-1 601 (700-1) | 840-2½ 821 (900-2½) | NA |

PORT ISABEL, TEXAS
Amdt 1A 11OCT18

26°10'N-97°21'W

RNAV (GPS) RWY 13

SC-3, 19 MAR 2026 to 16 APR 2026

SC-3, 19 MAR 2026 to 16 APR 2026