


|                        |                        |
|------------------------|------------------------|
| APP CRS<br><b>280°</b> | Rwy Ldg<br><b>3803</b> |
|                        | TDZE<br><b>422</b>     |
|                        | Apt Elev<br><b>424</b> |

# RNAV (GPS) RWY 28


WILLIAMSON/SODUS (SDC)

|                 |   |   |
|-----------------|---|---|
| RNP APCH - GPS. | <p><b>Procedure NA at night. Rwy 28 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Rochester altimeter setting and increase all MDAs 80 feet and LNAV visibility Cat C 1/8 SM, and Circling visibility Cat C 1/4 SM.</b></p> | <p><b>MISSED APPROACH:</b><br/>Climb to 3000 direct GOYER and hold.</p> |
|-----------------|---|---|

|                        |  |                                 |
|------------------------|--|---------------------------------|
| AWOS-3<br><b>124.2</b> | ROCHESTER APP CON<br><b>119.55 269.6</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|------------------------|--|---------------------------------|

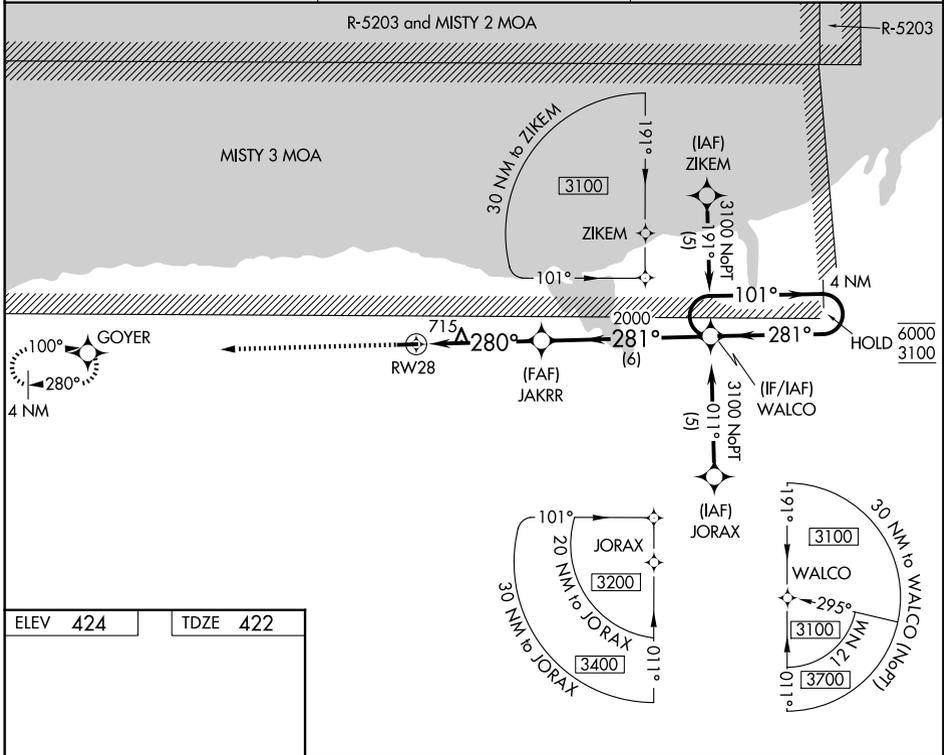

|   |                 |
|---|-----------------|
| ELEV <b>424</b>                                     | TDZE <b>422</b> |
|   |                 |
| <p>MIRL Rwy 10-28 0</p> <p>REIL Rwy 10 and 28 0</p> |                 |

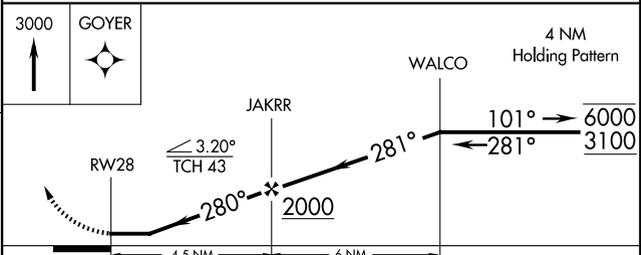

| CATEGORY | A                     | B                     | C                            | D  |
|----------|-----------------------|-----------------------|------------------------------|----|
| LNAV MDA | 980-1                 | 558 (600-1)           | 980-1 5/8<br>558 (600-1 5/8) | NA |
| CIRCLING | 1000-1<br>576 (600-1) | 1020-1<br>596 (600-1) | 1120-2<br>696 (700-2)        | NA |

NE-2, 19 MAR 2026 to 16 APR 2026

NE-2, 19 MAR 2026 to 16 APR 2026