

WAAS CH 40238 W27A	APP CRS 273°	Rwy Ldg TDZE Apt Elev	3641 708 708
----------------------------------------	------------------------	-----------------------------	-----------------------------------------


RNAV (GPS) RWY 27

ARENS FLD (RWN)


NA Baro-VNAV NA. Use Knox altimeter setting; when not received, use Rochester altimeter setting and increase all DA/MDA 20 feet and LNAV/VNAV all Cals visibility 1/8 mile. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH: Climb to 2400 direct ITELE and hold.

OXI AWOS-3 135.775	SOUTH BEND APP CON * 132.05 257.8	UNICOM 122.8 (CTAF) 0
------------------------------	---------------------------------------------	---------------------------------

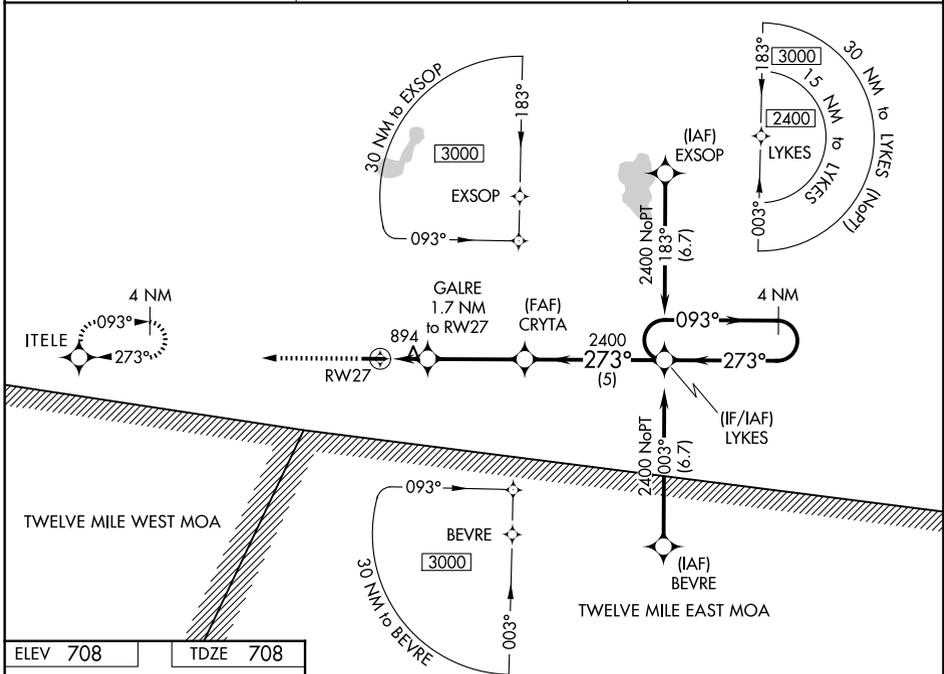

ELEV 708	TDZE 708
----------	----------

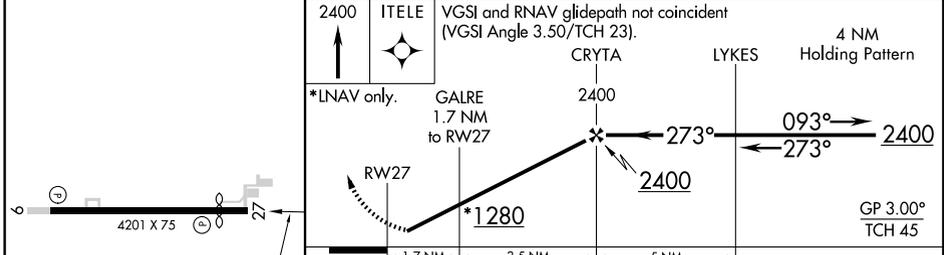

2400	ITELE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 23).	4 NM Holding Pattern
*LNAV only.	GALRE 1.7 NM to RWY 27	CRYTA 2400	LYKES 2400
	RWY 27	*1280	GP 3.00° TCH 45
	1.7 NM	3.5 NM	5 NM

CATEGORY	A	B	C	D
LPV DA	995-1		287 (300-1)	NA
LNAV/VNAV DA	1224-1 ³ / ₄		516 (600-1 ³ / ₄)	NA
LNAV MDA	1200-1	492 (500-1)	1200-1 ³ / ₈ 492 (500-1 ³ / ₈)	NA
CIRCLING	1240-1	532 (600-1)	1480-2 ¹ / ₄ 772 (800-2 ¹ / ₄)	NA