

WAAS CH <b>82330</b> <b>W29A</b>	APP CRS <b>291°</b>	Rwy Idg TDZE Apt Elev	<b>5001</b> <b>1164</b> <b>1171</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 29

IOWA COUNTY (MR.J)

RNP APCH - GPS.


**⚠** Baro-VNAV and VDP NA when using Platteville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Platteville altimeter setting and increase LPV DA to 1469 feet; increase LNAV/VNAV DA to 1524 feet; increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM.

**MISSED APPROACH:**  
Climb to 3500 direct YIDUC and hold.


AWOS-3  
**118.525**

CHICAGO CENTER  
**133.95 281.4**


UNICOM  
**122.8 (CTAF) 0**

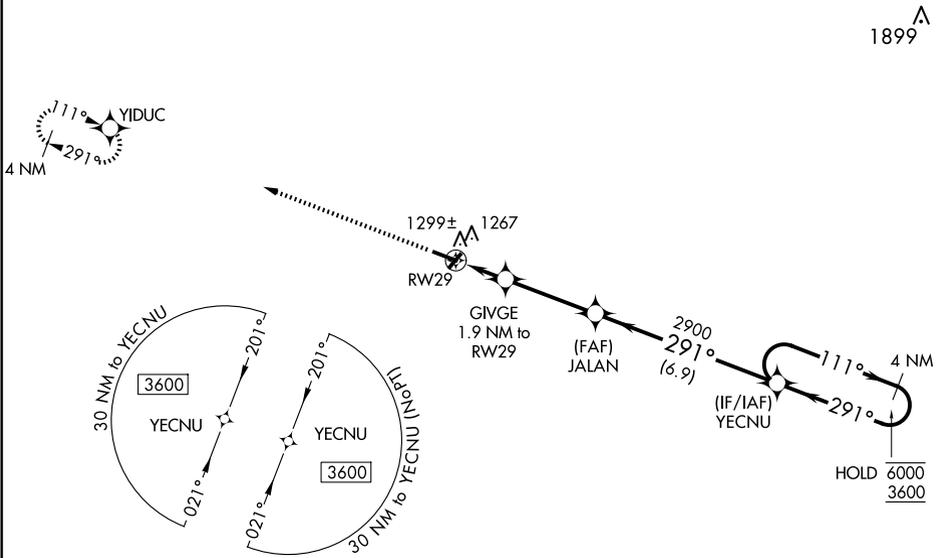

ELEV 1171	TDZE 1164
-----------	-----------

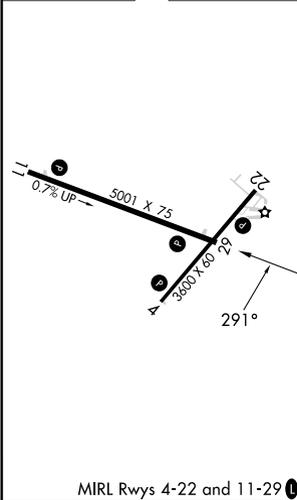

3500 YIDUC VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 44). 4 NM Holding Pattern

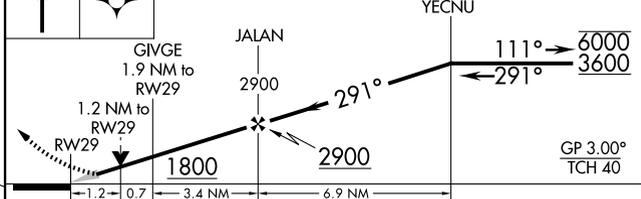

CATEGORY	A	B	C	D
LPV DA	1414-1	250 (300-1)		NA
LNAV/VNAV DA	1469-1	305 (300-1)		NA
LNAV MDA	1580-1	416 (500-1)	1580-1 1/8 416 (500-1 1/8)	NA
CIRCLING	1620-1 449 (500-1)	1640-1 469 (500-1)	1640-1 1/2 469 (500-1 1/2)	NA

EC-3, 19 MAR 2026 to 16 APR 2026

EC-3, 19 MAR 2026 to 16 APR 2026