

WAAS CH 63035 W19A	APP CRS 189°	Rwy Ldg TDZE 497 Apt Elev 499	5007
--	------------------------	---	-------------


RNAV (GPS) RWY 19

WILLIAM L WHITEHURST FLD (M08)

NA DME/DME RNP-0.3 NA. When local altimeter setting not received, use Jackson altimeter setting and increase all MDA 80 feet, increase LP Cats C/D visibilities ¼ mile, increase LNAV Cats C/D visibilities ½ mile and Circling Cats C/D visibilities ¼ mile. Rwy 19 helicopter visibility reduction below ¾ SM NA. Rwy 1 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 2500 direct LOHNI and hold.



AWOS-3 121.125	MEMPHIS CENTER 124.35 318.1	UNICOM 123.0 (CTAF)
--------------------------	---------------------------------------	-------------------------------

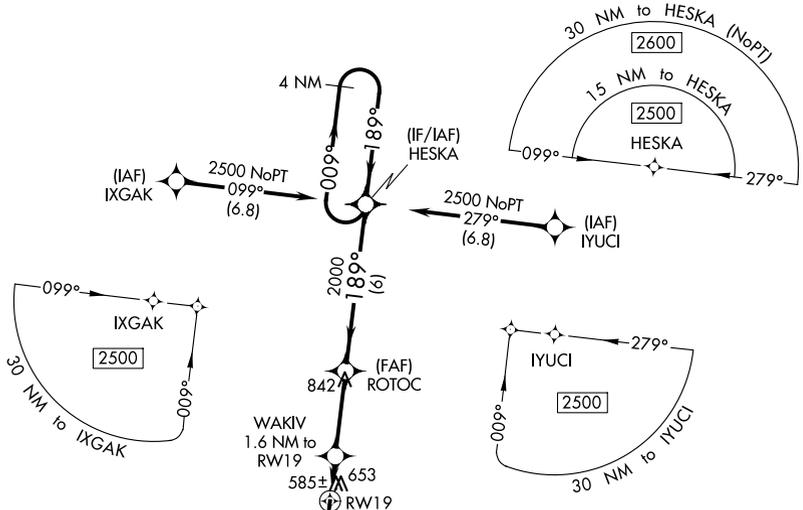

SE-1, 19 MAR 2026 to 16 APR 2026

SE-1, 19 MAR 2026 to 16 APR 2026

ELEV 499	TDZE 497
-----------------	-----------------

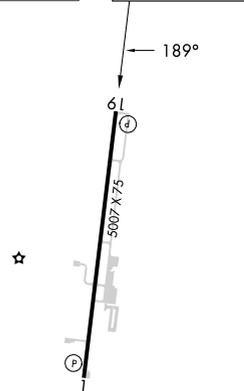

2500	LOHNI	Visual Segment - Obstacles.	HESKA	4 NM Holding Pattern
		WAKIV 1.6 NM to RWY 19	ROTOC	
		1020	2000	2500
		1.6 NM	3 NM	6 NM
CATEGORY	A	B	C	D
LP MDA	840-1 343 (400-1)			
LNAV MDA	920-1	423 (500-1)	920-1¼	423 (500-1¼)
CIRCLING	980-1	481 (500-1)	1100-1¾ 601 (700-1¾)	1360-2¾ 861 (900-2¾)