

| | | |
|--|------------------------|---|
| WAAS CH 50416 W02A | APP CRS 020° | Rwy Idg 6100 TDZE 3786 Apt Elev 3788 |
|--|------------------------|---|

RNAV (GPS) RWY 2



HEREFORD MUNI (HR.X)

RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, use AMA altimeter setting: increase LPV DA to 4098 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4238 feet and all visibilities ¼ SM; increase all MDAs 120 feet and LNAV visibility Cats C and D ¼ SM, increase Circling visibility Cat C ½ SM and Cat D ¼ SM. Circling NA to Rwys 14 and 32. Baro-VNAV and VDP NA when using AMA altimeter setting.

MISSED APPROACH:
Climb to 6000 direct WAHLO and hold.

| | | |
|-------------------------|--|---------------------------------|
| AWOS-3 118.05 | AMARILLO APP CON ★ 119.5 307.0 | UNICOM 122.8 (CTAF) 0 |
|-------------------------|--|---------------------------------|

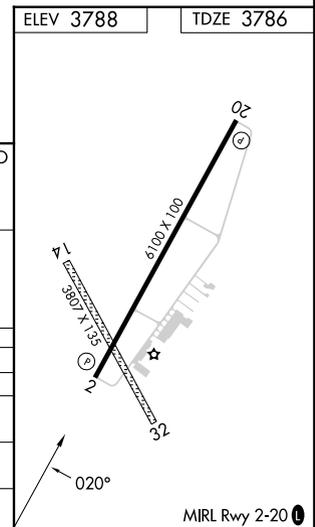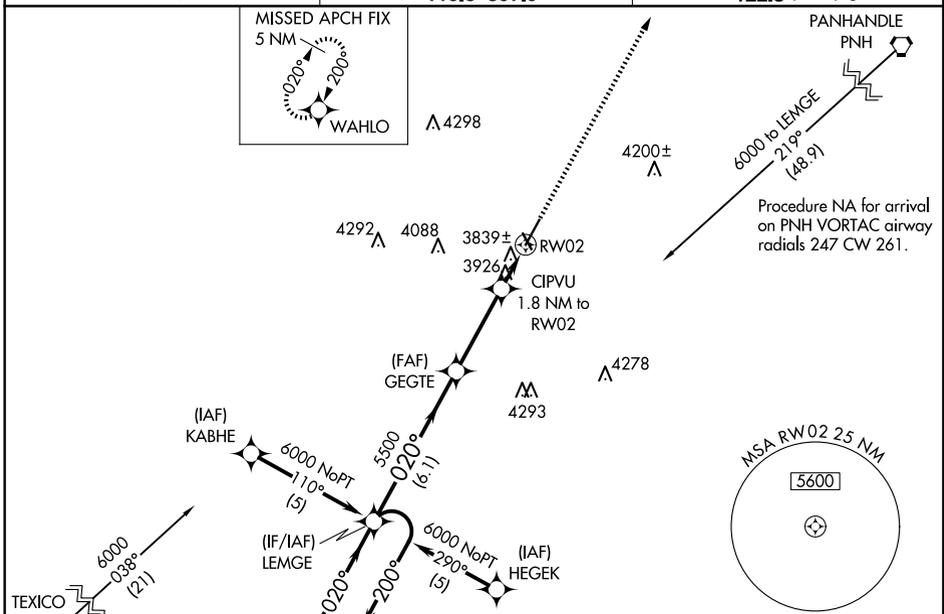

| | | | | |
|--------------|----------------------|-------------|-------------------------|-------------------------|
| CATEGORY | A | B | C | D |
| LPV DA | 3986-¾ 200 (200-¾) | | | |
| LNAV/DA VNAV | 4126-1¼ 340 (400-1¼) | | | |
| LNAV MDA | 4240-1 | 454 (500-1) | 4240-1¼ 454 (500-1¼) | 4240-1½ 454 (500-1½) |
| CIRCLING | 4280-1 | 492 (500-1) | 4440-1¾ 652 (700-1¾) | 4620-2¾ 832 (900-2¾) |

| | | | |
|--------------------|------|------|----------------|
| GP 3.00° TCH 52 | 5500 | 4400 | 1.3 NM to RW02 |
|--------------------|------|------|----------------|

SC-2, 19 MAR 2026 to 16 APR 2026

SC-2, 19 MAR 2026 to 16 APR 2026