

LOC I-MQJ 108.7	APP CRS 252°	Rwy Ldg TDZE Apt Elev	6005 860 862
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 25



INDIANAPOLIS RGNL (MQJ)

NA When local altimeter setting not received, use Indianapolis Intl altimeter setting and increase all DA 55 feet and all MDA 60 feet, increase S-LOC 25 Cats C/D visibility 1/8 mile and Circling Cat D visibility 1/4 mile.

MALSRL 

MISSED APPROACH: Climb to 1400 then climbing left turn to 2400 on SHB VOR/DME R-334 to SHB VOR/DME and hold.

AWOS-3PT 124.175	INDIANAPOLIS APP CON 127.15 317.8	UNICOM 122.975 (CTAF)
----------------------------	---	---------------------------------

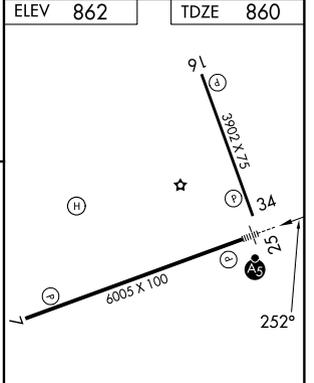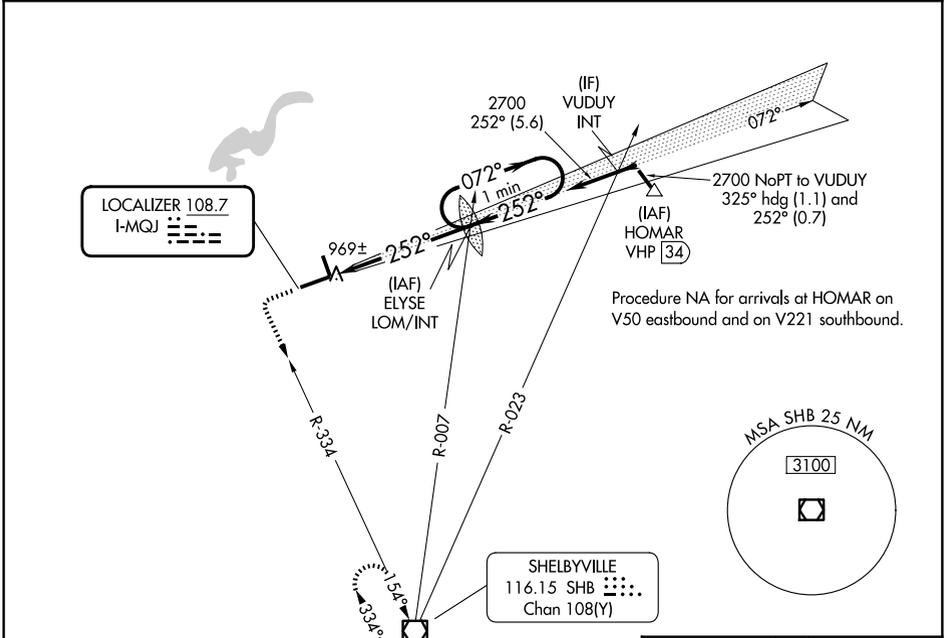

1400	2400	SHB	
	SHB R-334 		

REIL Rwy 7 and 34
HIRL Rwy 7-25 
MIRL Rwy 16-34

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

CATEGORY	A	B	C	D
S-ILS 25	1060-1/2 200 (200-1/2)			
S-LOC 25	1220-1/2	360 (400-1/2)	1220-5/8	360 (400-5/8)
CIRCLING	1340-1	478 (500-1)	1360-1/2	1660-2/2
			498 (500-1/2)	798 (800-2/2)

EC-2, 19 MAR 2026 to 16 APR 2026

EC-2, 19 MAR 2026 to 16 APR 2026