

WAAS CH 56310 W25A	APP CRS 252°	Rwy Ldg 6005 TDZE 860 Apt Elev 862
--	------------------------	---



RNAV (GPS) RWY 25

INDIANAPOLIS RGNL (MQJ)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Indianapolis Intl altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Indianapolis Intl altimeter setting and increase all DA 55 feet and all MDA 60 feet, and increase all visibilities 1/2 SM. When using Indianapolis altimeter setting inoperative table does not apply. For inoperative ALS, increase LPV all Cats visibility to 1 SM.

MALSR
 MISSED APPROACH: Climb to 2900 direct RAPBO and on track 143° to SHB VOR/DME and hold.

AWOS-3PT 124.175	INDIANAPOLIS APP CON 127.15 317.8	UNICOM 122.975 (CTAF)
----------------------------	---	---------------------------------

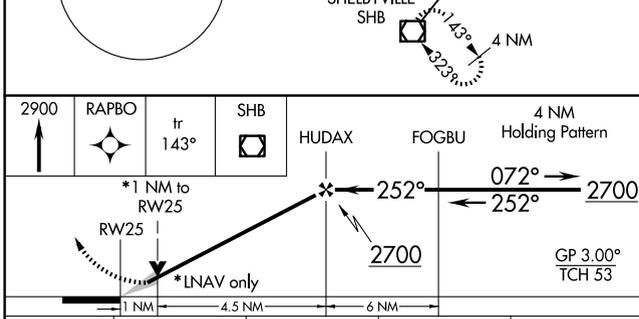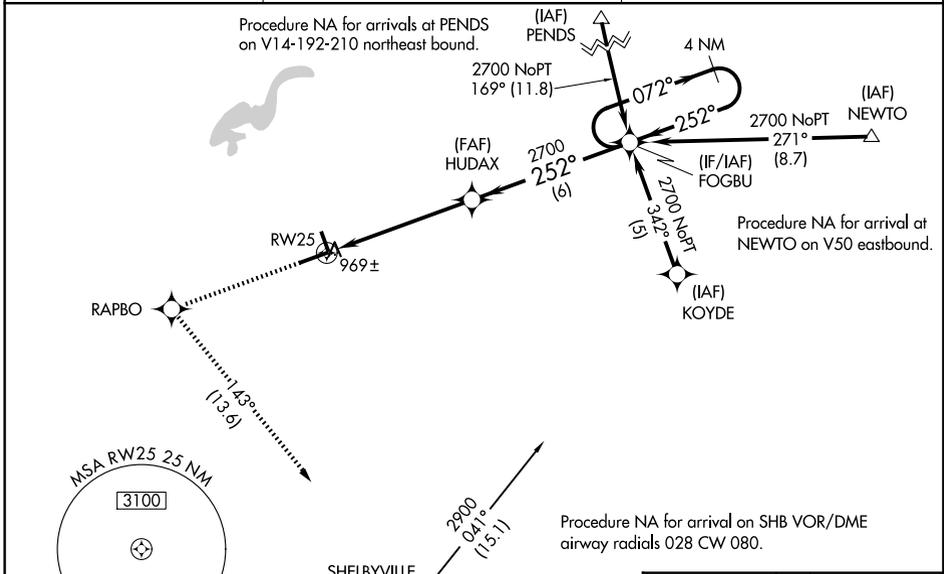

CATEGORY	A	B	C	D
LPV DA		1160-1/2	300 (300-1/2)	
LNAV/VNAV DA		1259-7/8	399 (400-7/8)	
LNAV MDA	1220-1/2	360 (400-1/2)	1220-5/8	360 (400-5/8)
CIRCLING	1340-1	478 (500-1)	1360-1 1/2	1660-2 1/2
			498 (500-1 1/2)	798 (800-2 1/2)

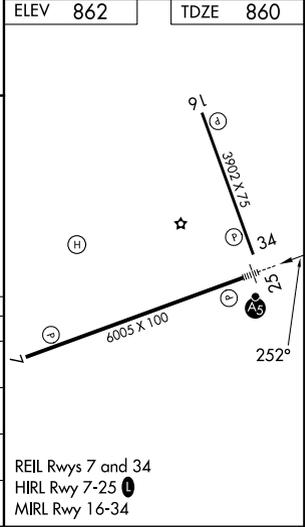

EC-2, 19 MAR 2026 to 16 APR 2026

EC-2, 19 MAR 2026 to 16 APR 2026