


WAAS CH <b>45722</b> <b>W11A</b>	APP CRS <b>110°</b>	Rwy Ldg <b>4876</b> TDZE <b>854</b> Apt Elev <b>871</b>
--	------------------------	---

# RNAV (GPS) RWY 11

LEBANON SPRINGFIELD/GEORGE HOERTER FLD (6I2)

RNP APCH.	<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.                  ▲ When local altimeter setting not received, use Danville altimeter setting and increase all DA 74 feet and all MDA 80 feet. Increase LPV, LNAV/VNAV, and Circling Cat D visibility 1/4 mile and LNAV Cats C/D 3/8 mile. Baro-VNAV NA when using Danville altimeter setting.</p>	MISSED APPROACH: Climb to 4000 direct WOBIL and hold, continue climb-in-hold to 4000.
-----------	---	---

AWOS-3P <b>119.725</b>	LOUISVILLE APP CON <b>132.075 327.0</b>	UNICOM <b>122.8 (CTAF) 0</b>
---------------------------	--	---------------------------------

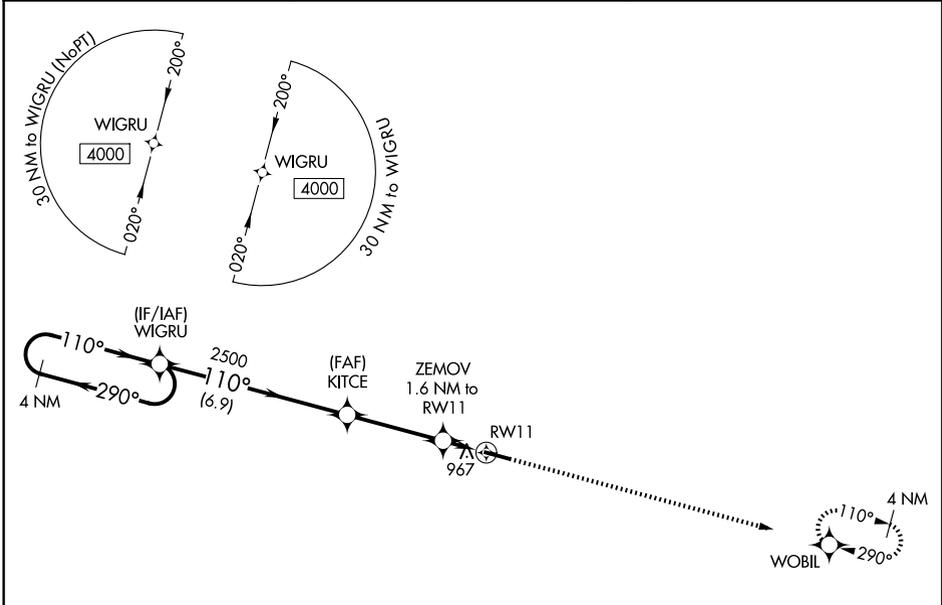

SE-1, 19 MAR 2026 to 16 APR 2026

SE-1, 19 MAR 2026 to 16 APR 2026

	ELEV 871	TDZE 854
4 NM Holding Pattern	WIGRU	4000 WOBIL
GP 3.00° TCH 36	<p>4000 ← 290° → 110° → 110° → 2500</p> <p>KITCE 2500</p> <p>ZEMOV 1.6 NM to RWY 11</p> <p>*1360</p> <p>RWY 11</p> <p>*LNAV only</p>	<p>110°</p> <p>1.0% UP → 5001 X 75</p>
	6.9 NM	3.6 NM 1.6 NM
CATEGORY	A	B C D
LPV DA		1104-1 250 (300-1)
LNAV/VNAV DA		1159-1 305 (300-1 1/8)
LNAV MDA		1220-1 366 (400-1)
CIRCLING	1320-1 449 (500-1)	1340-1 469 (500-1) 1360-1 489 (500-1 1/2) 1500-2 629 (700-2)
		MIRL Rwy 11-29 0 REIL Rwy 11 and 29 0

# RNAV (GPS) RWY 11