

WAAS CH 49113 W35A	APP CRS 349°	Rwy Ldg 5500 TDZE 1670 Apt Elev 1670
--	------------------------	---

RNAV (GPS) RWY 35

YORK MUNI (JYR)

RNP APCH.


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.
 ▲ When local altimeter setting not received, use Aurora altimeter setting and increase all DA/MDA 60 feet and all LPV, all LNAV/VNAV, and Cat C LNAV visibility ¼ mile.
 VDP and Baro-VNAV NA when using Aurora altimeter setting.

MISSED APPROACH:
 Climb to 4000 direct
 EHJAM and hold.

AWOS-3
124.175

MINNEAPOLIS CENTER
119.4 278.8



UNICOM
122.8 (CTAF) ①

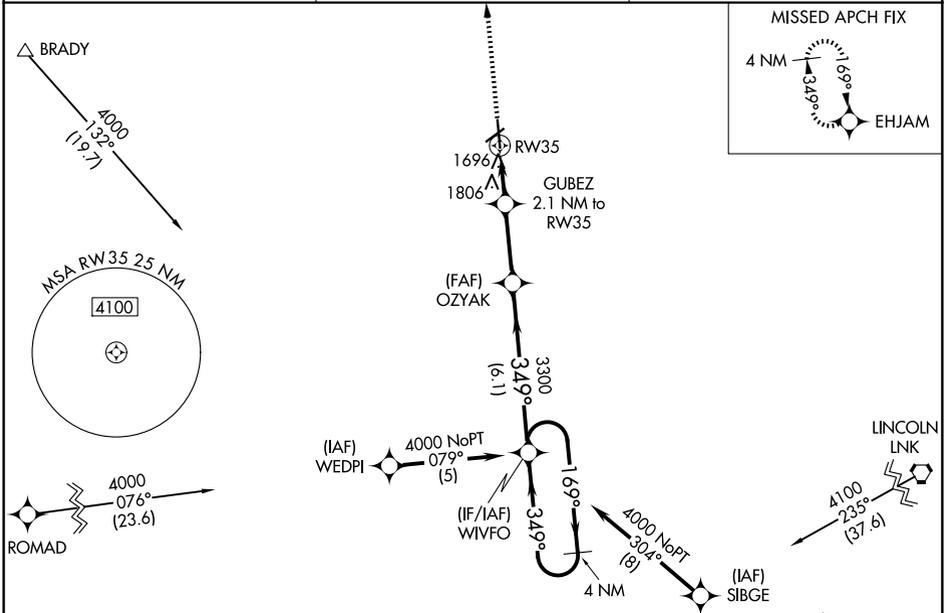

NC-2, 19 MAR 2026 to 16 APR 2026

NC-2, 19 MAR 2026 to 16 APR 2026

ELEV 1670 **D** TDZE 1670

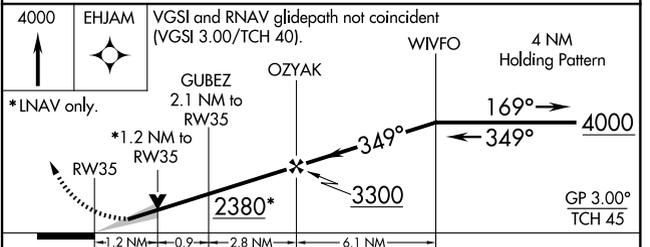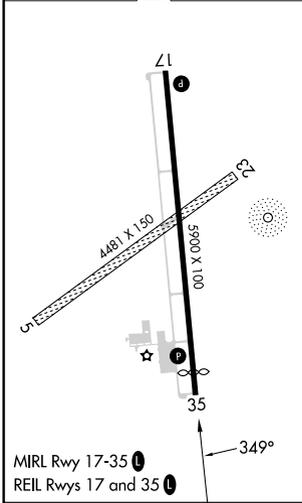

CATEGORY	A	B	C	D
LPV DA	1920-¾	250 (300-¾)		NA
LNAV/VNAV DA	2004-1¼	334 (400-1¼)		NA
LNAV MDA	2060-1	390 (400-1)		NA
CIRCLING	2060-1 390 (400-1)	2180-1 510 (600-1)	2200-1½ 530 (600-1½)	NA