


WAAS CH <b>82333</b> <b>W06A</b>	APP CRS <b>062°</b>	Rwy Ldg TDZE Apt Elev	<b>3798</b> <b>596</b> <b>597</b>
--	------------------------	-----------------------------	---

**RNAV (GPS) RWY 6**  
BROOKNEAL/CAMPBELL COUNTY (ØV4)

**▼** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lynchburg Rgnl/Preston Glenn Fld altimeter setting and increase all DA 81 feet and all MDA 100 feet, increase LPV all Cats visibility 1/8 mile, and increase LNAV/VNAV all Cats visibility 1/4 mile. Rwy 6 helicopter visibility reduction below 3/4 SM NA. Baro VNAV and VDP NA when using Lynchburg Rgnl/Preston Glenn Fld altimeter setting.

**▲** MISSED APPROACH: Climb to 1100 then climbing left turn to 3000 direct WUGAD and hold.

AWOS-3 <b>120,575</b>	ROANOKE APP CON <b>135,0 254,325</b>	UNICOM <b>122.7 (CTAF) Ø</b>
--------------------------	---	---------------------------------

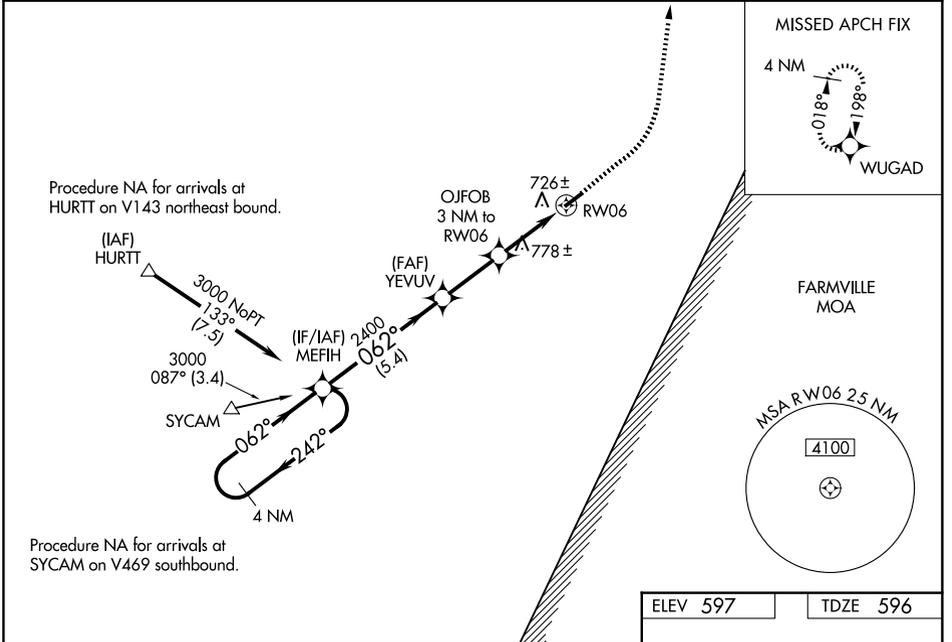

NE-3, 19 MAR 2026 to 16 APR 2026

NE-3, 19 MAR 2026 to 16 APR 2026

4 NM Holding Pattern		MEFIH	YEUVU	1100	3000	WUGAD
3000 ← 242°		062° →	062° ↓	OJFOB 3 NM to RW06	*1.3 NM to RW06	*LNAV only
GP 3.00° TCH 45		2400	*1580	RW06	3798 x 60	
← 5.4 NM		← 2.5 NM	← 1.7 NM	← 1.3 NM		
CATEGORY	A	B	C	D		
LPV DA	868-1	272 (300-1)		NA		
LNAV/VNAV DA	1031-1½	435 (500-1½)		NA		
LNAV MDA	1040-1	444 (500-1)		NA		
CIRCLING	1120-1 523 (600-1)	1180-1 583 (600-1)		NA		

MIRL Rwy 6-24 Ø  
REIL Rws 6 and 24 Ø