

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 45716 W35A | APP CRS 354° | Rwy Idg TDZE Apt Elev | 5001 956 971 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 35


PAULS VALLEY MUNI (P.V.J)

RNP APCH.

When local altimeter setting not received, use Ardmore Downtown Exec altimeter setting: increase all DA 97 feet and all MDA 100 feet; increase LPV and LNAV/VNAV all Cats visibility and LNAV Cats C/D and Circling Cat C visibility ¼ SM and Circling Cat D visibility ½ SM. Baro-VNAV and VDP NA when using Ardmore Downtown Exec altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 46°C.


MISSED APPROACH:
Climb to 3000 direct MELIE and hold.

| | | |
|--------------------------|--|---------------------------------|
| AWOS-3 118.675 | FORT WORTH CENTER 124.75 323.0 | UNICOM 122.8 (CTAF) ① |
|--------------------------|--|---------------------------------|

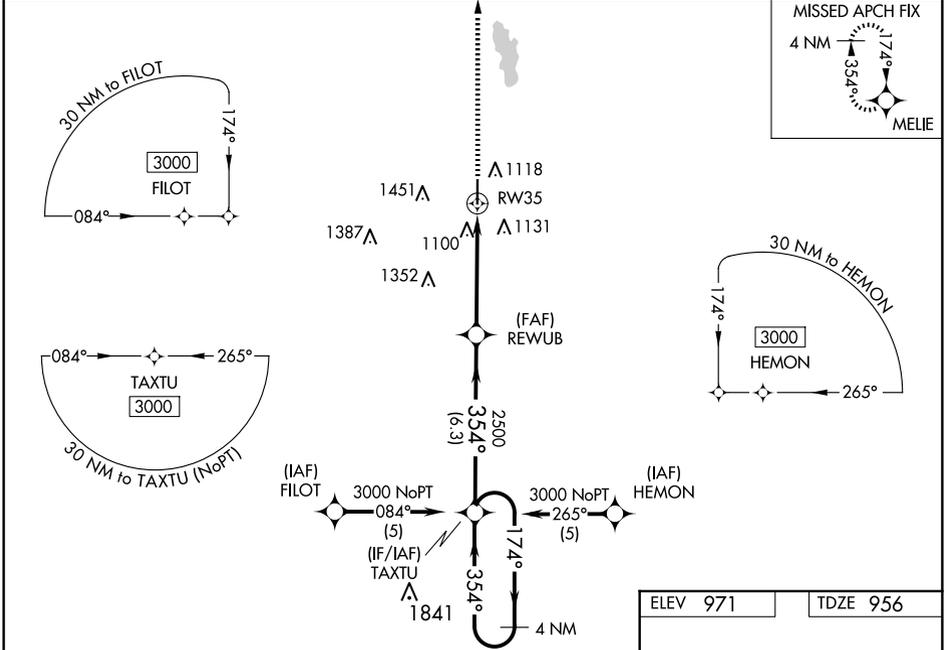

SC-1, 19 MAR 2026 to 16 APR 2026

SC-1, 19 MAR 2026 to 16 APR 2026

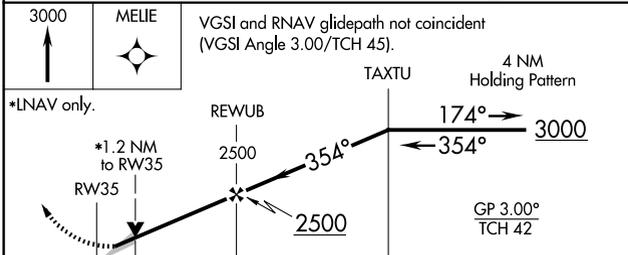

| CATEGORY | A | B | C | D |
|--------------|--------|-------------|--------------|--------------|
| LPV DA | | 1156-¾ | 200 (200-¾) | |
| LNAV/VNAV DA | | 1447-1¾ | 491 (500-1¾) | |
| LNAV MDA | 1360-1 | 404 (400-1) | 1360-1¼ | 404 (400-1¼) |
| CIRCLING | 1440-1 | 469 (500-1) | 1540-1½ | 1760-2½ |
| | | | 569 (600-1½) | 789 (800-2½) |

