

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 50308 W24A | APP CRS 241° | Rwy Ldg TDZE Apt Elev | 5000 666 666 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 24



PONTIAC MUNI (PNT)

RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using BMI altimeter setting. When local altimeter setting not received, use BMI altimeter setting: increase LPV DA to 1014 feet; increase LNAV/VNAV DA to 1237 feet and all visibilities ¼ SM; increase all MDAs 100 feet and visibility LNAV Cat C ¼ SM and Circling Cat C ½ SM.


MISSED APPROACH: Climb to 3000 direct BUCLA and hold.

| | | |
|--------------------------|---------------------------------------|-----------------------------------|
| AWOS-3 119.675 | CHICAGO CENTER 123.75 259.1 | UNICOM 123.075 (CTAF) 0 |
|--------------------------|---------------------------------------|-----------------------------------|

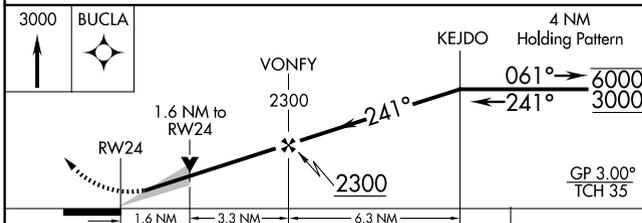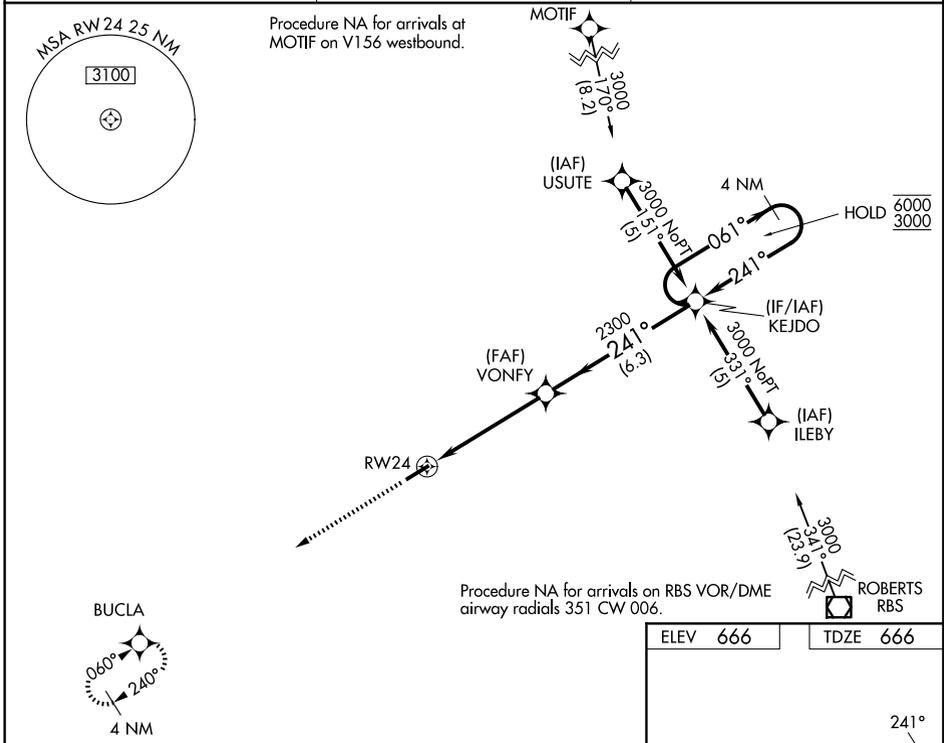

| | |
|----------|----------|
| ELEV 666 | TDZE 666 |
|----------|----------|

| CATEGORY | A | B | C | D |
|--------------|------------|-------------|-------------------------------|----|
| LPV DA | 916-1 | | 250 (300-1) | NA |
| LNAV/VNAV DA | 1139-1 3/8 | | 473 (500-1 3/8) | NA |
| LNAV MDA | 1220-1 | 554 (600-1) | 1220-1 5/8 554 (600-1 3/8) | NA |
| CIRCLING | 1220-1 | 554 (600-1) | 1320-1 3/4 654 (700-1 3/4) | NA |

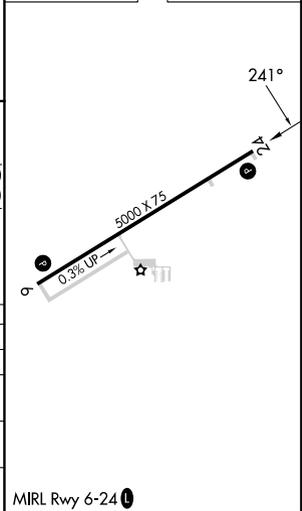

EC-3, 19 MAR 2026 to 16 APR 2026

EC-3, 19 MAR 2026 to 16 APR 2026