


LOC/DME I-FBS 111.55 Chan 52(Y)	APP CRS 339°	Rwy Ldg 8800 TDZE 1273 Apt Elev 1288
--	------------------------	---

ILS or LOC RWY 34R



NORTHWEST ARKANSAS NTL (X.N.A)

DME or RADAR required for LOC only.		MALSR	MISSED APPROACH: Climb to 1800 then climbing right turn to 3400 on heading 163° and RZC VORTAC R-204 to LNSDY INT/I-FBS 12.9 DME/RADAR and hold.
▼ For inop ALS, increase S-ILS 34R Cat E visibility to RVR 4000 and S-LOC 34R Cats C/D/E visibility to RVR 5500. ▲ *RVR 1800 authorized with use of FD or AP or HUD to DA.			

ATIS 119.425	RAZORBACK APP CON* 121.0 244.575	NORTHWEST ARKANSAS NTL TOWER * 127.1 (CTAF) 0	GND CON 121.9
------------------------	--	---	-------------------------

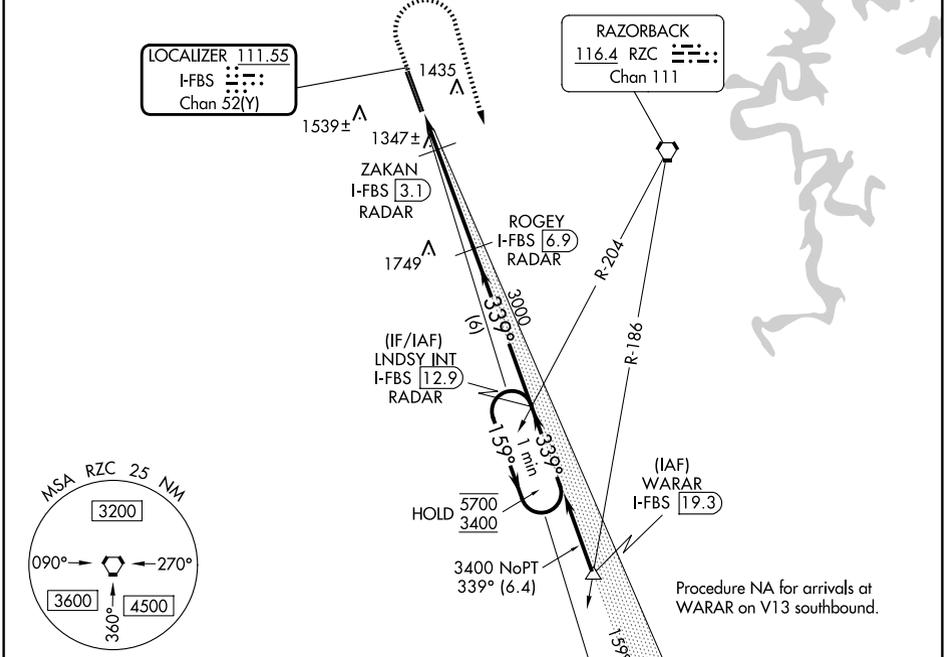

ELEV 1288	D TDZE 1273
HIRL Rwy 16L-34R 0 MIRL Rwy 16R-34L	

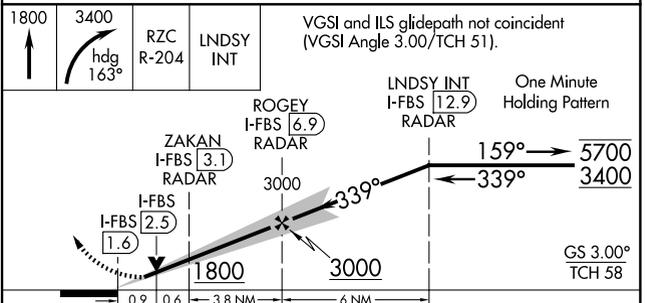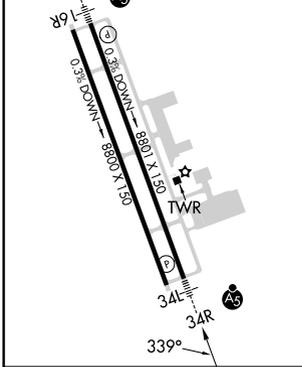

CATEGORY	A	B	C	D	E
S-ILS 34R*	1473/24 200 (200-½)				
S-LOC 34R	1620/24	347 (400-½)	1620/30 347 (400-¾)		
CIRCLING	1740-1 452 (500-1)	1760-1 472 (500-1)	2040-2¼ 752 (800-2¼)	2080-2½ 792 (800-2½)	2080-2¾ 792 (800-2¾)

SC-1, 19 MAR 2026 to 16 APR 2026

SC-1, 19 MAR 2026 to 16 APR 2026