

WAAS CH 65740 W24A	APP CRS 236°	Rwy Ldg 6001 TDZE 4237 Apt Elev 4265
--	------------------------	---


RNAV (GPS) RWY 24

SILVER SPRINGS (SPZ)

NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C (-9°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Use Fallon NAS (Van Voorhis Flt) altimeter setting; when not received, use Reno/Tahoe Intl altimeter setting.

MISSED APPROACH: Climb to 6900 then climbing left turn to 9900 direct HZN VORTAC and hold, continue climb-in-hold to 9900.
*Missed approach requires minimum climb of 315 feet per NM to 6900.

AWOS-2 120.475	KNFL ATIS* 370.925	NAVY FALLON APP CON 120.85 360.2	CTAF 122.90
--------------------------	------------------------------	--	-----------------------

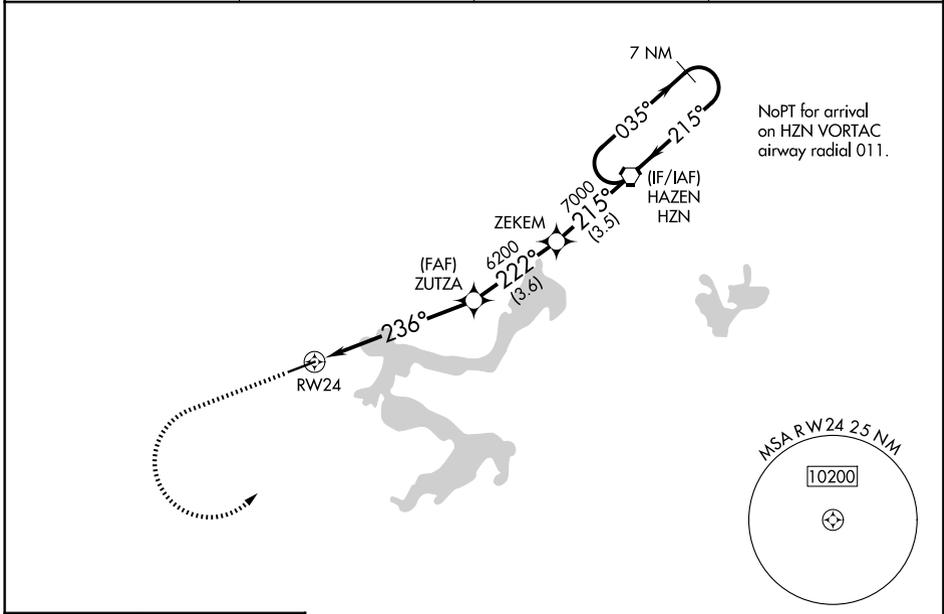

SW-4, 19 MAR 2026 to 16 APR 2026

SW-4, 19 MAR 2026 to 16 APR 2026

ELEV 4265	TDZE 4237	6900	9900	HZN			
		RWY 24		ZUTZA	ZEKEM	HAZEN HZN	7 NM Holding Pattern
		236°	222°	215°	215°	035°	8000
		6200	6200	7000			
		6.1 NM	3.6 NM	3.5 NM			
		GP 3.00°		TCH 40			
		MIRL Rwy 6-24		REIL Rwy 6 and 24			
CATEGORY	A	B	C	D			
LPV DA*	4593-1¼		356 (400-1¼)		NA		
LPV DA	5007-3		770 (800-3)		NA		
LNAV/VNAV DA	5209-4		972 (1000-4)		NA		
LNAV MDA	5280-1¼	5280-1½	5280-3	1043 (1100-3)	NA		
CIRCLING	5280-1¼	5620-1½	6040-3	1775 (1800-3)	NA		
	1015 (1100-1¼)	1355 (1400-1½)					