

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 50133 W11A | APP CRS 105° | Rwy Ldg TDZE Apt Elev | 3302 1183 1183 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 11

PAYNESVILLE MUNI (PEX)

RNP APCH - GPS.


⚠ Baro-VNAV and VDP NA when using Lf altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Lf altimeter setting and increase LPV DA to 1434 feet; increase LNAV/VNAV DA to 1704 feet and all visibilities 1/8 SM. Increase all MDAs 60 feet and LNAV and Circling visibility Cat C 1/4 SM.

MISSED APPROACH:
Climb to 3000 direct
UDALE and hold.

AWOS-3PT
120.35

MINNEAPOLIS CENTER
125.5 323.1



CTAF
122.9

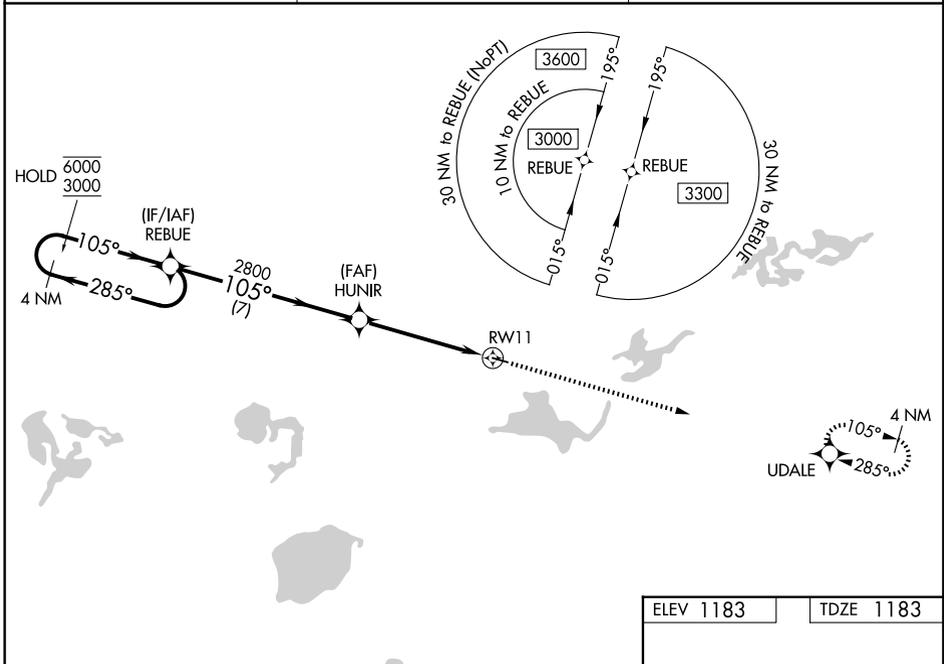

NC-1, 19 MAR 2026 to 16 APR 2026

NC-1, 19 MAR 2026 to 16 APR 2026

| | |
|-----------|-----------|
| ELEV 1183 | TDZE 1183 |
|-----------|-----------|

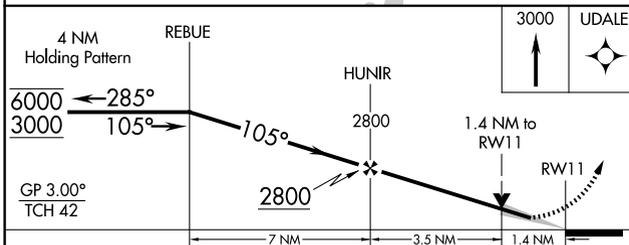

| CATEGORY | A | B | C | D |
|--------------|----------------------------|----------------------------|--------------------|----|
| LPV DA | 1383-1 200 (200-1) | | | NA |
| LNAV/VNAV DA | 1653-1 3/8 470 (500-1 3/8) | | | NA |
| LNAV MDA | 1680-1 497 (500-1) | 1680-1 3/8 497 (500-1 3/8) | | NA |
| CIRCLING | 1680-1 497 (500-1) | 1760-1 577 (600-1) | 1920-2 737 (800-2) | NA |

MIRL Rwy 11-29 **⓪**
REIL Rws 11 and 29 **⓪**