

WAAS CH 62928 W28A	APP CRS 280°	Rwy Ldg TDZE 928 Apt Elev 928	4549
--	------------------------	---	-------------

RNAV (GPS) RWY 28

BOGGS FLD (USW)


RNP APCH.

▼ Rwy 28 helicopter visibility reduction below 1 SM NA. Rwy 28 Straight-in and Circling minimums NA at night. When local altimeter setting not received, use Charleston altimeter setting and increase all MDA's 80 feet, LP and LNAV Cats C and D visibility 1/8 SM and Circling Cats C and D visibility 1/4 SM. *1780 when using Charleston altimeter setting.

▲ NA

MISSED APPROACH:
Climb to 3500 direct WILHI and hold.

AWOS-3 118.575	CHARLESTON APP CON 124.1 269.125	UNICOM 122.725 (CTAF) ①
---------------------------------	---	--

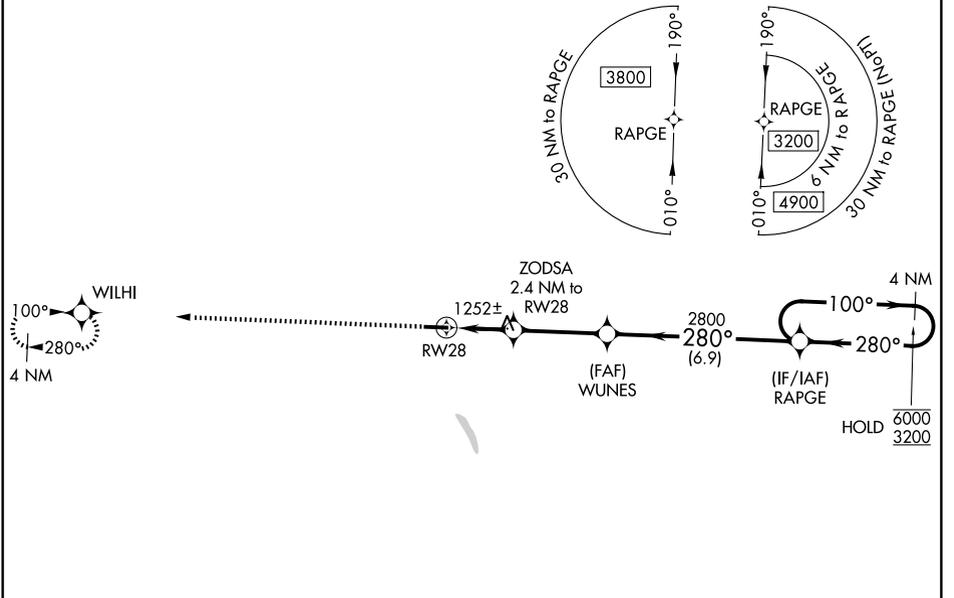

NE-4, 19 MAR 2026 to 16 APR 2026

NE-4, 19 MAR 2026 to 16 APR 2026

ELEV 928	TDZE 928			
CATEGORY	A	B	C	D
LP MDA	1520-1	592 (600-1)	1520-1 3/4	592 (600-1 3/4)
LNAV MDA	1520-1	592 (600-1)	1520-1 3/4	592 (600-1 3/4)
CIRCLING	1560-1 632 (700-1)	1760-1 1/4 832 (900-1 1/4)	1760-2 1/2 832 (900-2 1/2)	1760-2 3/4 832 (900-2 3/4)