
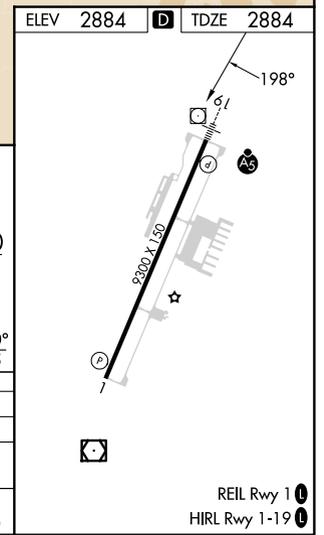
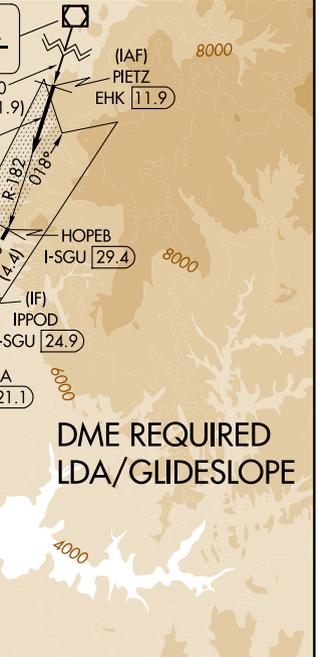


|  |                        |  |                         |
|--|------------------------|--|-------------------------|
| LOC/DME I-SGU<br><b>110.9</b><br>Chan 46 | APP CRS<br><b>198°</b> | Rwy Ldg TDZE<br><b>9300</b><br><b>2884</b> | Apt Elev<br><b>2884</b> |
|--|------------------------|--|-------------------------|

**LDA RWY 19**  
ST GEORGE RGNL (SGU)

|  |                    |  |
|--|--------------------|--|
| <p><b>NA</b> -5°C</p> <p>DME required. For inop ALS, increase S-LDA/GS 19 all Cats visibility to 7/8 SM.</p> | <p><b>MALS</b></p> | <p><b>MISSED APPROACH:</b> Climb to 4200 then climbing right turn to 9800 on heading 354° and UTI VOR/DME R-314 to HUNKU INT/ MMM 42.1 DME and hold, continue climb-in-hold to 9800.</p> |
|--|--------------------|--|

|                            |  |                          |                                 |
|----------------------------|--|--------------------------|---------------------------------|
| AWOS-3PT<br><b>135.075</b> | LOS ANGELES CENTER<br><b>124.2 343.6</b> | CLNC DEL<br><b>133.3</b> | UNICOM<br><b>123.075 (CTAF)</b> |
|----------------------------|--|--------------------------|---------------------------------|

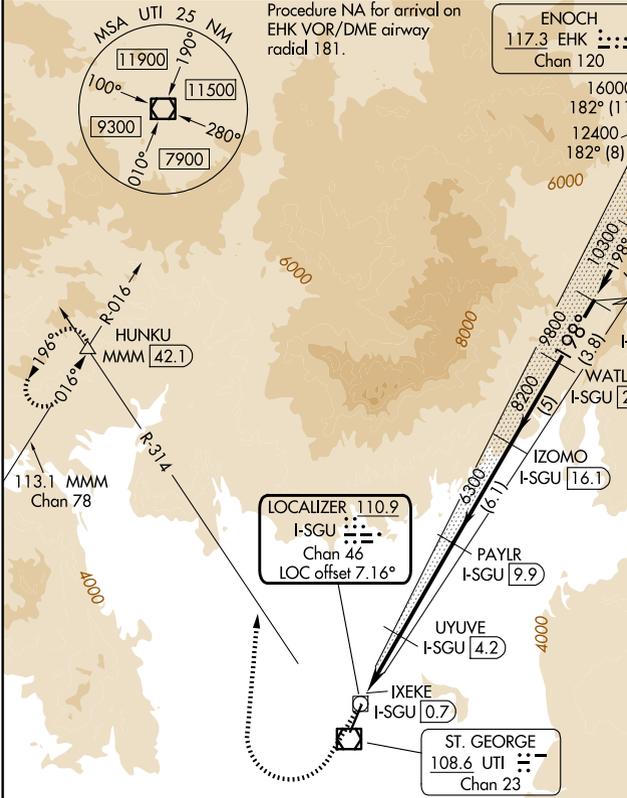

|            |          |                              |   |                    |
|------------|----------|------------------------------|---|--------------------|
| 4200       | 9800     | HUNKU                        | Use I-SGU DME when on the localizer course. | IPPOD              |
| ↑          | hdg 354° | UTI R-314                    |   | WATLA I-SGU [21.1] |
| *LDA only. |          | UYUVE                        |   | IPPOD I-SGU [24.9] |
|            |          | *I-SGU [3]                   |   |                    |
|            |          | I-SGU [4.2]                  |   |                    |
|            |          | IXEKE I-SGU [0.7]            |   |                    |
|            |          | 4300*                        |   |                    |
|            |          | 6300                         |   |                    |
|            |          | PAYLR I-SGU [9.9]            |   |                    |
|            |          | IZOMO I-SGU [16.1]           |   |                    |
|            |          | 8200                         |   |                    |
|            |          | 9800                         |   |                    |
|            |          | 10300                        |   |                    |
|            |          | LOC unusable inside 0.7 DME. |   |                    |
|            |          | GS 3.10°                     |   |                    |
|            |          | TCH 55                       |   |                    |
| 0.7        | 2.3 NM   | 1.2 NM                       | 5.7 NM                                      | 6.1 NM             |
|            |          |                              | 5 NM  | 3.8 NM             |

| CATEGORY    | A                               | B                               | C                       | D                       |
|-------------|---------------------------------|---------------------------------|-------------------------|-------------------------|
| S-LDA/GS 19 |                                 | 3170-1/2                        | 286 (300-1/2)           |                         |
| S-LDA 19    | 3940-3/4<br>1056 (1100-3/4)     | 3940-1<br>1056 (1100-1)         | 3940-2 1/2              | 1056 (1100-2 1/2)       |
| CIRCLING    | 3940-1 1/4<br>1056 (1100-1 1/4) | 3940-1 1/2<br>1056 (1100-1 1/2) | 3940-3<br>1056 (1100-3) | 4660-3<br>1776 (1800-3) |

SW-4, 19 MAR 2026 to 16 APR 2026

SW-4, 19 MAR 2026 to 16 APR 2026