

WAAS CH <b>90337</b> <b>W34A</b>	APP CRS <b>343°</b>	Rwy Ldg TDZE Apt Elev	<b>8203</b> <b>7280</b> <b>7289</b>
--	------------------------	-----------------------------	---


# RNAV (GPS) RWY 34

KEMMERER MUNI (EMM)

**⚠** Baro-VNAV and VDP NA when using Evanston altimeter setting.  
**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C (-16°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.  
 Night landing: Rwy 4, 10, 22, 28 NA. When local altimeter setting not received, use Evanston altimeter setting: increase all DA 111 feet and visibilities 1/8 mile; increase all MDA 120 feet.

**MISSED APPROACH:** Climb to 12000 direct ATOXY and on track 268° direct GEGME and hold, continue climb-in-hold to 12000.

AWOS-3PT <b>119.675</b>	SALT LAKE CITY CENTER <b>124.35 353.5</b>	UNICOM <b>122.8 (CTAF)</b> <b>📻</b>
----------------------------	--	--


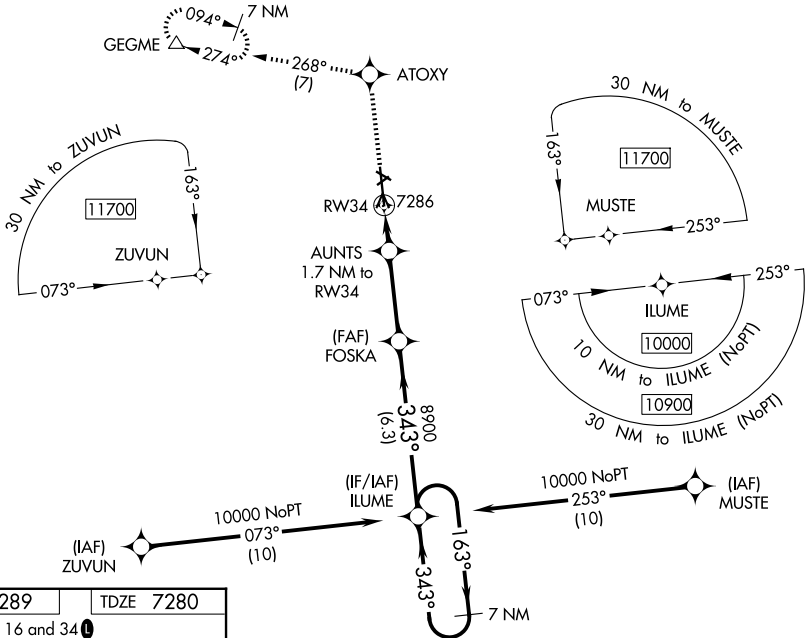


NW-1, 16 APR 2026 to 14 MAY 2026

NW-1, 16 APR 2026 to 14 MAY 2026

ELEV 7289	TDZE 7280
-----------	-----------

REIL Rwy 16 and 34 **📻**  
 MIRL Rwy 16-34 and 4-22 **📻**

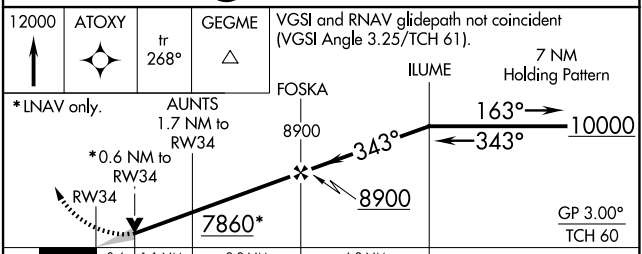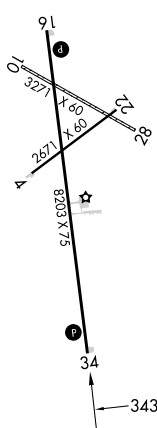

CATEGORY	A	B	C	D
LPV DA	7530-1	250 (300-1)		NA
LNAV/VNAV DA	7530-1	250 (300-1)		NA
LNAV MDA	7540-1	260 (300-1)		NA
CIRCLING	7660-1 371 (400-1)	8240-1½ 951 (1000-1½)		NA