


LOC I-SPI 109.5	APP CRS 043°	Rwy Ldg TDZE Apt Elev	7927 592 598
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 4

ABRAHAM LINCOLN CAPITAL (SPI)

ADF Required.		MALSR		MISSED APPROACH: Climb to 1500 then climbing left turn to 2300 direct HUSKK LOM and hold.	
<p>⚠ When local altimeter setting not received, use Lincoln altimeter setting and increase all DA 57 feet, all MDA 60 feet, increase S-LOC and Circling Cat C/D visibility ¼ mile. For inop ALS when using Lincoln altimeter setting, increase S-LOC 4 Cats C and D visibility to 1 3/8 SM. ASR *RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Lincoln altimeter setting).</p>		<p>ATIS 127.65 270.1</p>		<p>SAINT LOUIS APP CON 126.15 323.0</p>	
<p>SPRINGFIELD TOWER ★ 121.3 (CTAF) 257.8</p>		<p>GND CON 121.9 348.6</p>		<p>UNICOM 122.95</p>	

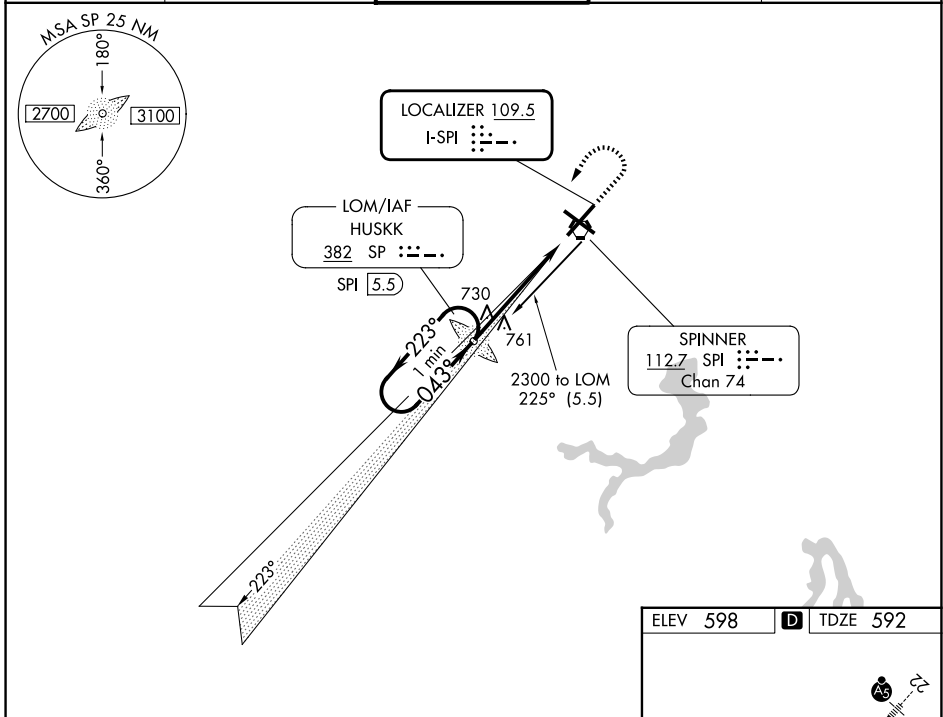

One Minute Holding Pattern	SP LOM SPI 5.5	1500	2300	SP
2300 ← 223°	2297	↑	↶	⊙
GS 3.00°	2300			
TCH 56				
← 5.1 NM →				
CATEGORY	A	B	C	D
S-ILS 4	* 792/24 200 (200-1/2)			
S-LOC 4	1020/24	428 (500-1/2)	1020/40	428 (500-3/4)
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2 1/4 762 (800-2 1/4)	1380-2 1/2 782 (800-2 1/2)

