


VORTAC SPI 112.7 Chan 74	APP CRS 055°	Rwy Ldg TDZE Apt Elev	7927 592 598
--	------------------------	-----------------------------	---

VOR RWY 4

ABRAHAM LINCOLN CAPITAL (SPI)


DME required.		MALSR	MISSED APPROACH: Climb to 1500 then climbing left turn to 2500 on heading 325° and on SPI VORTAC R-355 to GROWL/14.7 DME and hold.
<p>▼ VDP NA when using AAA altimeter setting. When local altimeter setting not received, use AAA altimeter setting; increase all MDAs 60 feet and Circling Cat C/D visibility ¼ SM. For inop ALS, increase S-4 Cat C/D visibility to RVR 5500.</p> <p>▲ ASR</p>			

ATIS 127.65 270.1	SAINT LOUIS APP CON 126.15 323.0	SPRINGFIELD TOWER ★ 121.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	--	--	-------------------------------	-------------------------

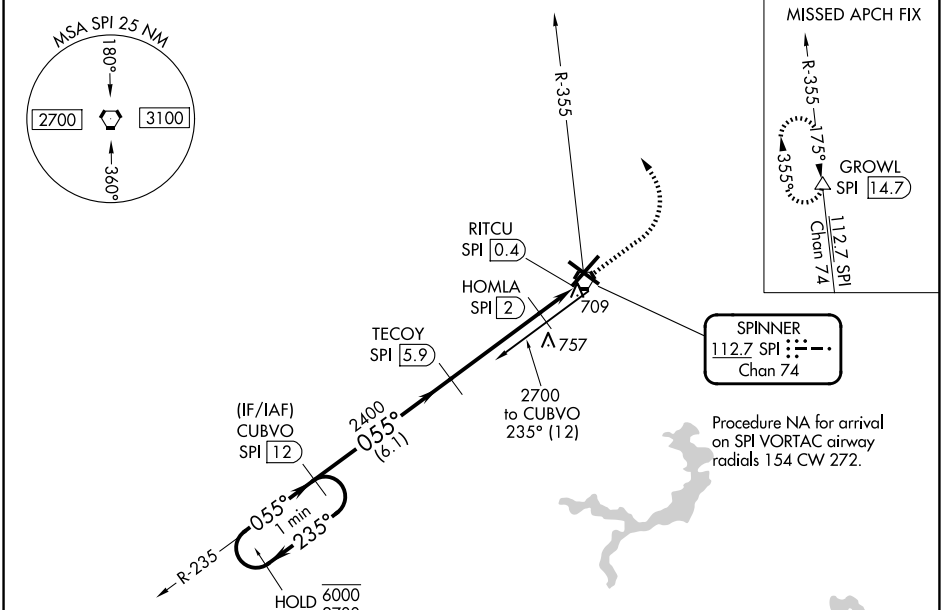


SPINNER
112.7 SPI
Chan 74

Procedure NA for arrival on SPI VORTAC airway radials 154 CW 272.



One Minute Holding Pattern	CUBVO SPI [12]		TECOY SPI [5.9]	1500	2500	SPI R-355	GROWL
	6000 ← 235°	2700 → 055°	2400	hdg 325°	HOMLA SPI [2]	SPI [1.4]	RITCU SPI [0.4]
	6.1 NM		4 NM		0.6		1 NM
CATEGORY	A	B	C	D			
S-4	960/24 368 (400-½)		960/40 368 (400-¾)				
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)			

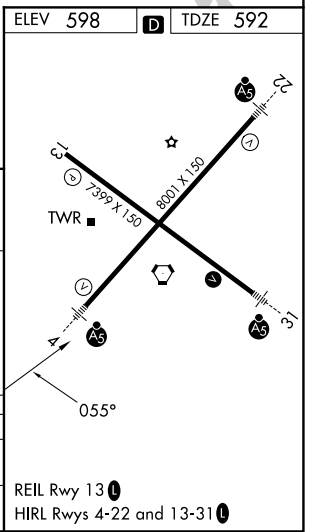

VOR RWY 4

EC-3, 16 APR 2026 to 14 MAY 2026

EC-3, 16 APR 2026 to 14 MAY 2026