ILS Z or LOC Z RWY 26L

HARRY REID INTL (LAS)

LOC/DME I-RLE	APP CRS		26L	26R
111.5	259°	Rwy Ldg	10526	12638
Chan 52		TDZE	2069	2067
		Apt Elev	2181	2181

DME required.

Inop table does not apply to S-ILS 26L and Sidestep 26R. For inop ALS, increase S-LOC 26L Cat C/D/E visibility to 1⅜ SM.

MALSF Rwy 26L (A4) MALS Rwy 26R (A4)

MISSED APPROACH: Climb to 3200 then climbing right turn to 6000 heading 080° and on BLD R-287 to BLD VORTAC and hold, continue climb-in-hold to 6000.

D-ATIS	LAS VEGAS APP CON	LAS VEGAS TOWER	GND CON	CLNC DEL	CPDLC
132.4	125.025 379.15 (West) 119.775 282.2 (East)	118.75 257.8 (Rwy 1L/19R, 1R/19L) 119.9 257.8 (Rwy 8L/26R, 8R/26L)	121.1 270.8 E of 1R/19L 121.9 254.3 W of 1L/19R	118.0	

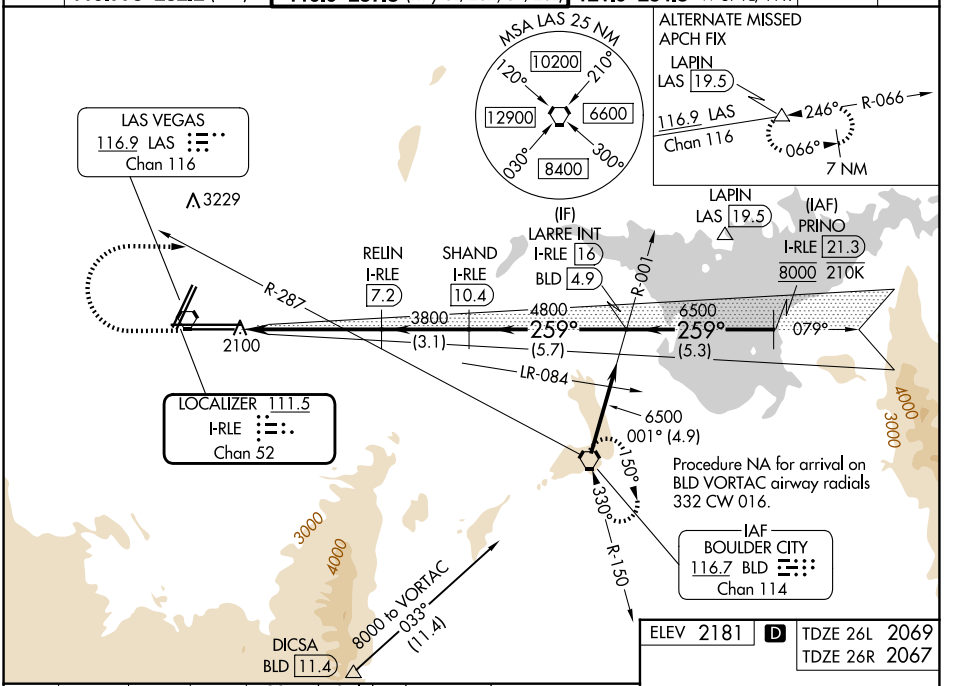

ELEV 2181 D

TDZE 26L	2069
TDZE 26R	2067

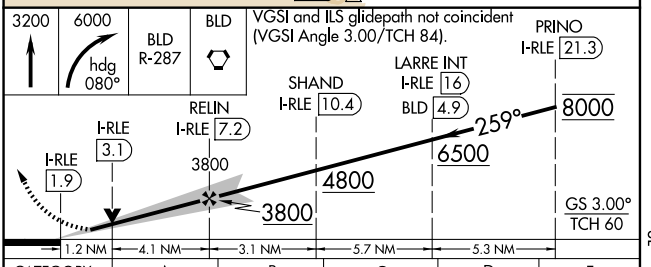



CATEGORY	A	B	C	D	E
S-ILS 26L	2269-¾ 200 (100-¾)				
S-LOC 26L	2520-¾ 451 (400-¾)		2520-1 451 (400-1)		
SIDESTEP 26R	2560-1 493 (400-1)		2560-1½ 493 (400-1½)	2560-2 493 (400-2)	
CIRCLING	3020-1¼ 839 (900-1¼)	3060-1¼ 879 (900-1¼)	3100-2¾ 919 (1000-2¾)	3540-3 1359 (1400-3)	

MIRL Rwy 1R-19L
REIL Rwys 1R, 8R, 19L and 19R
HIRL Rwys 1L-19R, 8L-26R and 8R-26L

SW-4, 16 APR 2026 to 14 MAY 2026
SW-4, 16 APR 2026 to 14 MAY 2026