| WAAS CH 48940 W13A | APP CRS 129° | Rwy Idg 5012<br>TDZE 54<br>Apt Elev 55 |
|---|---|---|

# RNAV (GPS) RWY 13

## KNOX COUNTY RGNL (RKD)

DME/DME RNP -0.3 NA. VDP and Baro-VNAV NA when using Wiscasset altimeter setting. When local altimeter setting not received, use Wiscasset altimeter setting and increase LPV DA to 319 feet, LNAV/VNAV DA to 467 feet and all MDA 80 feet. Increase LNAV/VNAV visibility all Cats to 1 SM, LNAV Cat C/D to 1 SM and Circling Cat C to 2 ¼ SM. For inop ALS increase LNAV/VNAV all Cats visibility to 1⅛ SM. For inop ALS when using Wiscasset altimeter setting increase LPV all Cats visibility to ⅞ SM, LNAV/VNAV all Cats visibility to 1⅜ SM and LNAV Cat C/D to 1⅜ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).

MALSR

MISSED APPROACH: Climb to 800 then climbing right turn to 2400 direct AVMAW and hold.

| AWOS-3PT | PORTLAND APP CON ★ | CLNC DEL | UNICOM |
|---|---|---|---|
| 119.025 | 120.4 299.2 | 123.8 | 123.05 (CTAF) L |

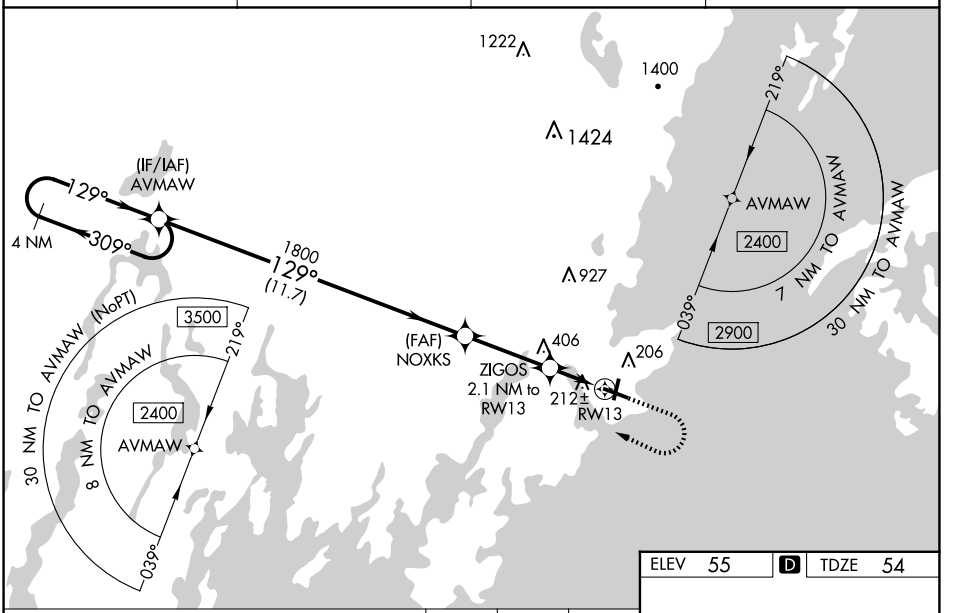


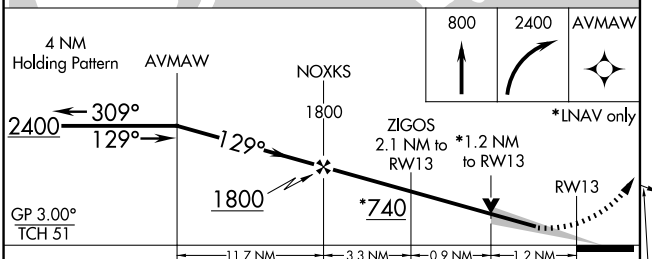


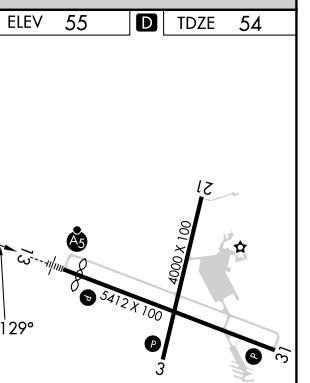


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 254-½ 200 (200-½) | | | |
| LNAV/VNAV DA | 402-¾ 348 (400-¾) | | | |
| LNAV MDA | 480-½ 426 (500-½) | | 480-¾ 426 (500-¾) | |
| C CIRCLING | 580-1 525 (600-1) | | 720-1¾ 665 (700-1¾) | 1140-3 1085 (1100-3) |

REIL Rwys 3 and 31 L
MIRL Rwy 3-21 L
HIRL Rwy 13-31 L



NE-1, 16 APR 2026 to 14 MAY 2026
NE-1, 16 APR 2026 to 14 MAY 2026