


WAAS CH 49106 W33A	APP CRS 326°	Rwy Ldg 10179 TDZE 93 Apt Elev 100
--	------------------------	---

RNAV (GPS) RWY 33

COLD BAY (CDB) (PACD)

RNP APCH.	MISSED APPROACH: Climb to 3000 direct DEADS and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. Circling NA for Cat A southwest of Rwy 15-33 at night. Circling NA for Cat B/C/D southwest of Rwy 15-33.	

ASOS 135.75	ANCHORAGE CENTER 118.5 278.3	COLD BAY RADIO 123.6 (CTAF) 0
-----------------------	--	---

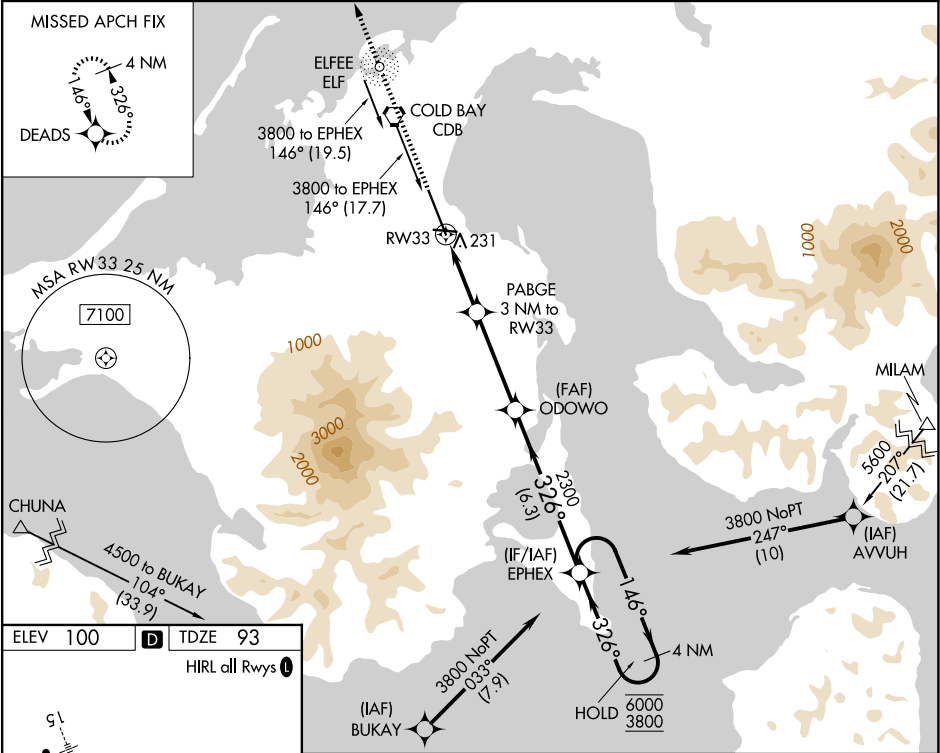

ELEV 100 D TDZE 93 HIRL all Rwy 33		3000 DEADS VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 36).		EPHEX 4 NM Holding Pattern	
*LNAV only 1.2 NM to RW33		PABGE 3 NM to RW33		ODOWO 2300	
RW33 10179 x 150		1100*		326° 6000 3800	
4900 x 150		1.2 NM 1.8 NM 3.8 NM 6.3 NM		GP 3.00° TCH 55	
CATEGORY		A		B	
LPV DA		293-¾ 200 (200-¾)		C	
LNAV/VNAV DA		392-⅞ 299 (300-⅞)		D	
LNAV MDA		500-1 407 (400-1)		500-1½ 407 (400-1½)	
CIRCLING		540-1 440 (500-1)		560-1 460 (500-1)	
		560-1½ 460 (500-1½)		860-2½ 760 (800-2½)	