GATEWAY ONE DEPARTURE

(GATWY1.TWILA) 08NOV18

CAHOKIA/ST. LOUIS, ILLINOIS

ST LOUIS DOWNTOWN (CPS)

ATIS
121.45
CLNC DEL
118.275
121.8 (when tower closed)
GND CON
121.8
DOWNTOWN TOWER ★
119.925 379.3
ST LOUIS DEP CON
123.7 371.875

TOP ALTITUDE: ASSIGNED BY ATC

TAKEOFF MINIMUMS
Rwys 12L/R, 23, 30R: Standard.
Rwy 5: 200-1¼ or standard with minimum climb of 343′ per NM to 700.
Rwy 30L: 400-2½ or standard with minimum climb of 220′ per NM to 900, or alternatively, with standard takeoff minimums and a normal 200′ per NM climb gradient, takeoff must occur no later than 2100′ prior to DER.

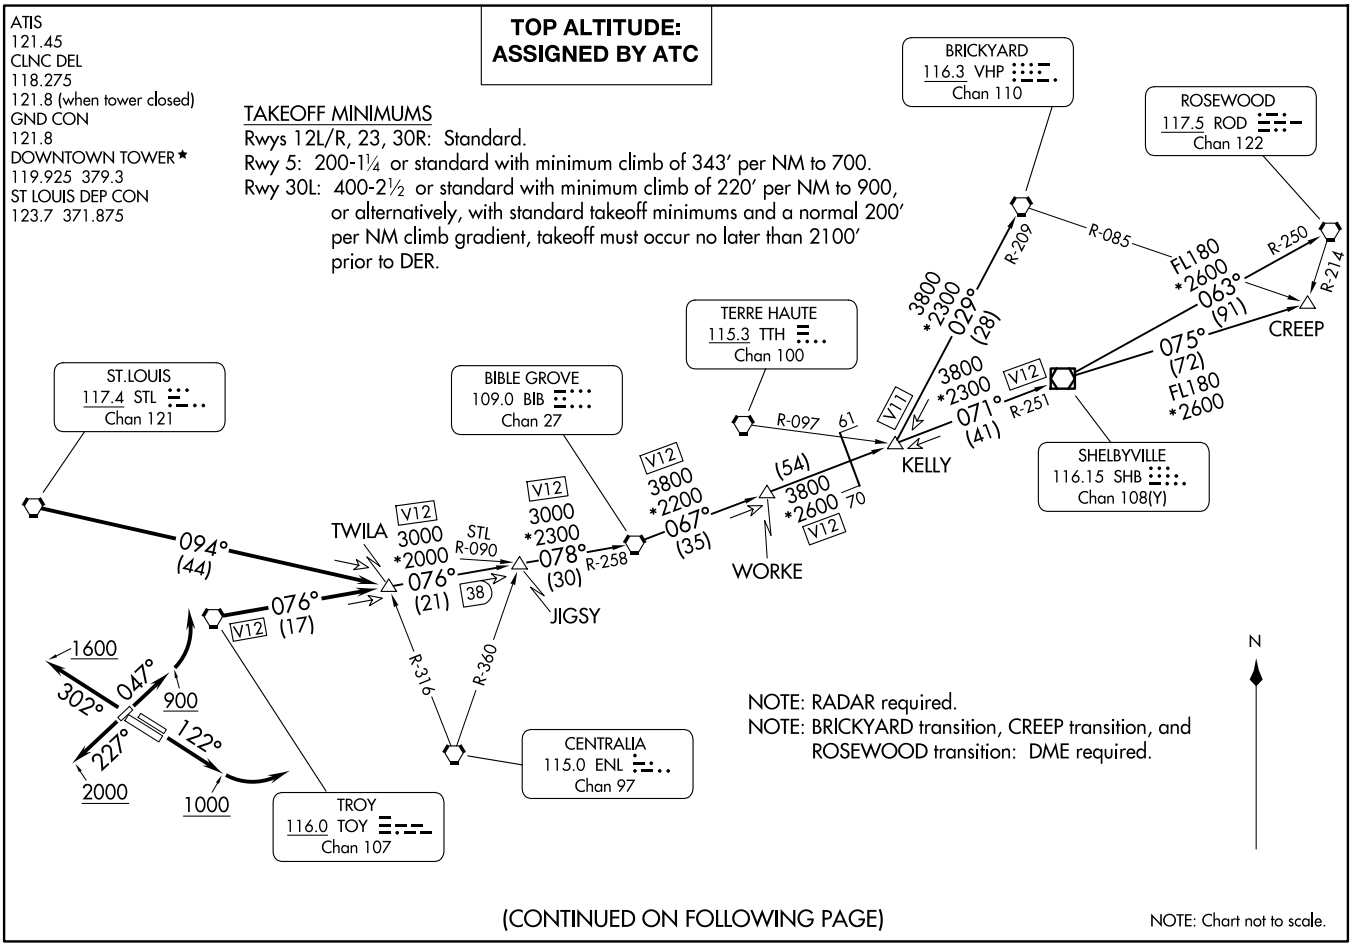

NOTE: RADAR required.
NOTE: BRICKYARD transition, CREEP transition, and ROSEWOOD transition: DME required.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

(GATWY1.TWILA) 24025

GATEWAY ONE DEPARTURE

AL-5316 (FAA)

ST LOUIS DOWNTOWN (CPS)

CAHOKIA/ST. LOUIS, ILLINOIS