


LOM RU 275	APP CRS 202°	Rwy Ldg TDZE Apt Elev	5501 772 772
----------------------	------------------------	-----------------------------	---



NDB RWY 20
MID-CAROLINA RGNL (RUQ)

▼ When local altimeter setting not received, use Lexington altimeter setting and increase all MDA 40 feet, increase S-20 Cats C and D, and Circling Cat C visibility 1/8 SM and Circling Cat D 1/4 SM. For inop ALS, increase Cat D visibility to 1 7/8 SM. For inop ALS when using Lexington altimeter setting increase Cat D visibility to 2 SM.

▲ NA

MALS R  **MISSED APPROACH:** Climb to 1800 then climbing right turn to 2500 direct ROVDY LOM and hold.

AWOS-3 118.175	CHARLOTTE APP CON 128.325 307.8	UNICOM 122.725 (CTAF) 0
--------------------------	---	-----------------------------------

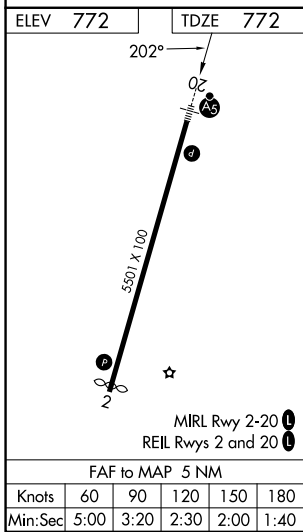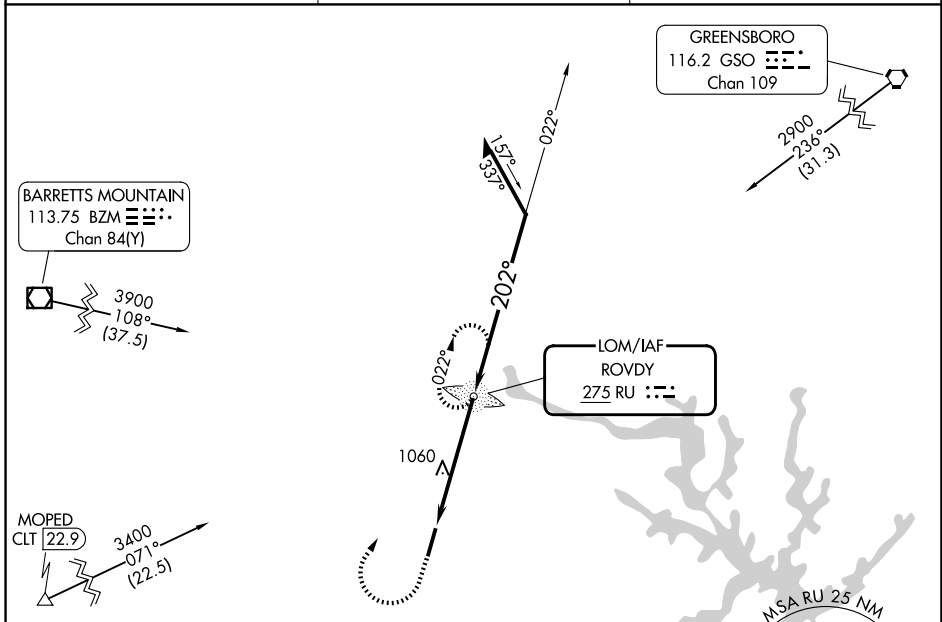

1800	2500	RU	ROVDY RU LOM	6000	022°	Remain within 10 NM
			2500	202°	2500	
			3.20°	TCH 39		
			5 NM			
CATEGORY	A	B	C	D		
S-20	1420-3/4	648 (700-3/4)	1420-1 3/8	648 (700-1 3/8)		
CIRCLING	1420-1	648 (700-1)	1440-1 7/8	668 (700-1 7/8)	1440-2	668 (700-2)

SE-2, 16 APR 2026 to 14 MAY 2026

SE-2, 16 APR 2026 to 14 MAY 2026