

WAAS CH <b>62805</b> <b>W35A</b>	APP CRS <b>350°</b>	Rwy Ldg <b>5000</b> TDZE <b>756</b> Apt Elev <b>763</b>
--	------------------------	---

# RNAV (GPS) RWY 35



HURON COUNTY MEML (BAX)

**RNP APCH.**



**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use MBS Intl altimeter setting and increase all DA 129 feet and all MDA 140 feet; increase LPV all Cats and LNAV Cat C visibility 3/8 mile. Rwy 35 helicopter visibility reduction below 3/4 SM NA. VDP and Baro/VNAV NA when using MBS Intl altimeter setting.

**MISSED APPROACH:** Climb to 3000 direct ELARE and hold.

AWOS-3P <b>118.6</b>	CLEVELAND CENTER <b>127.7 290.425</b>	UNICOM <b>123.075 (CTAF) 0</b>
-------------------------	--	-----------------------------------

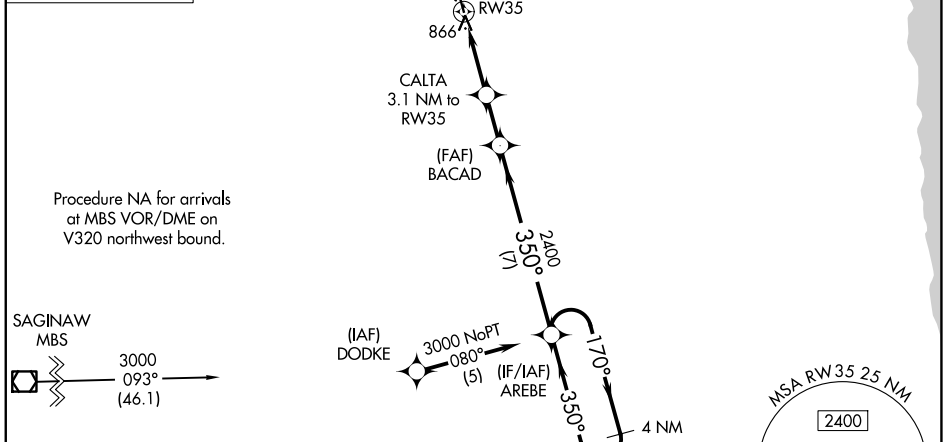

ELEV 763	TDZE 756
----------	----------

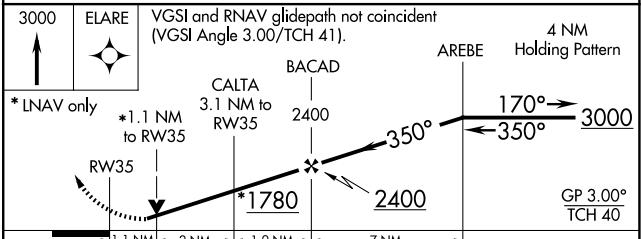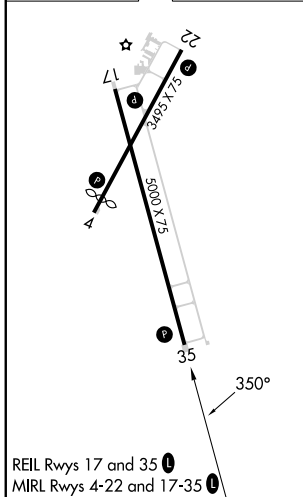

CATEGORY	A	B	C	D
LPV DA	1113-1¼	357 (400-1¼)		NA
LNAV/VNAV DA	1154-1½	398 (400-1½)		NA
LNAV MDA	1520-1 764 (800-1)	1520-1¼ 764 (800-1¼)	1520-2½ 764 (800-2½)	NA