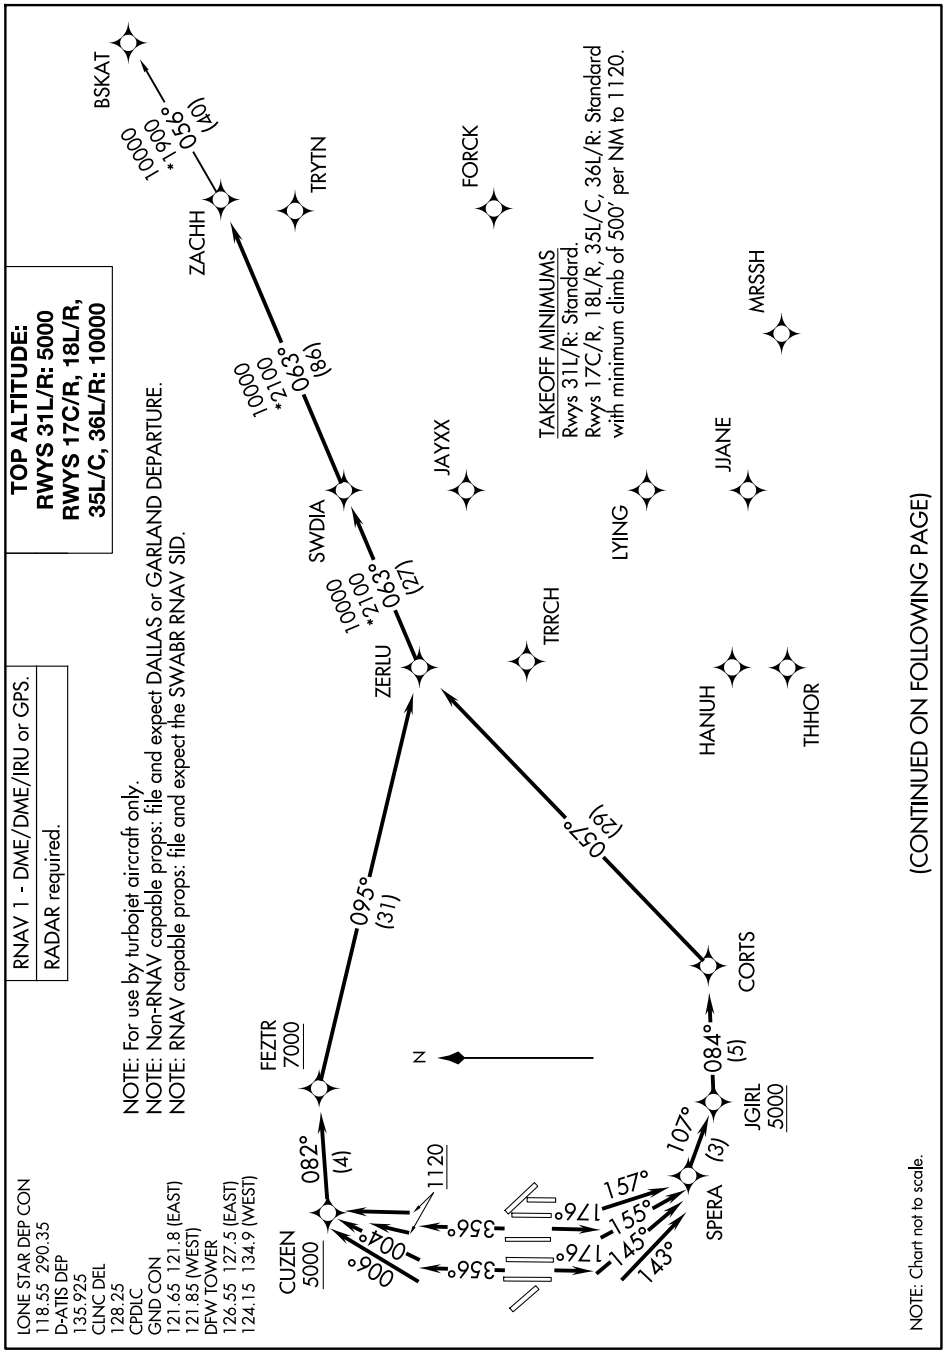
LONE STAR DEP CON
118.55 290.35
D-ATIS DEP
135.925
CLNC DEL
128.25
CPDLC
GND CON
121.65 121.8 (EAST)
121.85 (WEST)
DFW TOWER
126.55 127.5 (EAST)
124.15 134.9 (WEST)
RNAV 1 - DME/DME/IRU or GPS.
RADAR required.
TOP ALTITUDE:
RWYS 31L/R: 5000
RWYS 17C/R, 18L/R,
35L/C, 36L/R: 10000
NOTE: For use by turbojet aircraft only.
NOTE: Non-RNAV capable props: file and expect DALLAS or GARLAND DEPARTURE.
NOTE: RNAV capable props: file and expect the SWABR RNAV SID.
BSKAT
ZACHH
TRYTN
FORCK
SWDIA
JAYXX
ZERLU
TRRCH
LYING
JJANE
MRSSH
HANUH
THHOR
CORTS
FEZTR
7000
CUZEN
5000
SPERA
JGIRL
5000
N
TAKEOFF MINIMUMS
Rwys 31L/R: Standard.
Rwys 17C/R, 18L/R, 35L/C, 36L/R: Standard with minimum climb of 500′ per NM to 1120.
(CONTINUED ON FOLLOWING PAGE)
NOTE: Chart not to scale.