

| | |
|------------------------|------------------------|
| APP CRS 273° | Rwy Idg 4850 |
| | TDZE 778 |
| | Apt Elev 790 |


RNAV (GPS) RWY 27

BULT FLD (C56)

NA DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Use Lansing Muni altimeter setting, when not received, use Chicago Midway Intl altimeter setting and increase all MDA 40 feet. Procedure NA at night.

MISSED APPROACH: Climb to 2600 direct RODJU and via 196° track to EON VORTAC and hold.

| | | | |
|---------------------------|--------------------------------|--------------------------------------|-------------------------------|
| AWOS-AV 119.125 | IGQ AWOS-3PT 124.925 | CHICAGO CENTER 132.5 284.7 | UNICOM 123.0 (CTAF) |
|---------------------------|--------------------------------|--------------------------------------|-------------------------------|

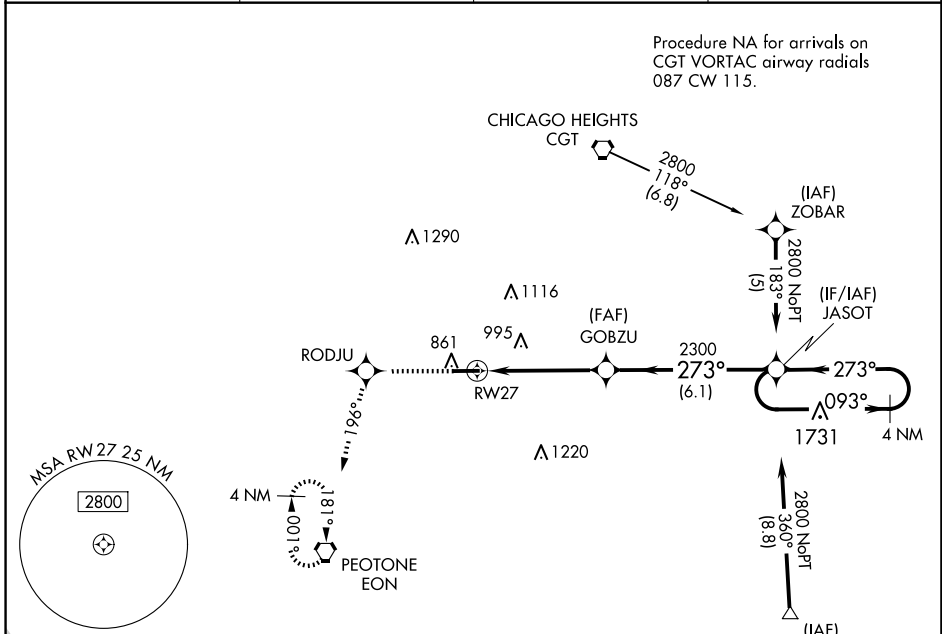

| | |
|----------|----------|
| ELEV 790 | TDZE 778 |
|----------|----------|



| | | | | | |
|---------------|-----------------------|-----------------------|-------------------------|------|----------------------|
| LIRL Rwy 9-27 | 2600 | RODJU | tr 196° | EON | 4 NM Holding Pattern |
| | 5001 X 75 | → 0.4% UP | 27 | 273° | |
| CATEGORY | A | B | C | D | |
| LNAV MDA | 1320-1 | 542 (600-1) | 1320-1½ 542 (600-1½) | NA | |
| CIRCLING | 1320-1 530 (600-1) | 1400-1 610 (700-1) | 1400-1¾ 610 (700-1¾) | NA | |

EC-3, 16 APR 2026 to 14 MAY 2026

EC-3, 16 APR 2026 to 14 MAY 2026