

WAAS CH <b>99503</b> <b>W27A</b>	APP CRS <b>270°</b>	Rwy Ldg TDZE Apt Elev	<b>6500</b> <b>17</b> <b>17</b>
----------------------------------------	------------------------	-----------------------------	---------------------------------------

# RNAV (GPS) RWY 27


GULF SHORES INTL/JACK EDWARDS FLD (JKA)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Pensacola Intl altimeter setting. Circling Rwy 17, 35 NA at night. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Pensacola Intl altimeter setting and increase LPV DA to 295 feet; increase LNAV/VNAV DA to 559 feet and all visibilities ¼ SM; increase all MDAs 80 feet and visibility Cts C and D ¼ SM. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM. For inop ALS, when using Pensacola Intl altimeter setting minimums, increase LPV all Cats visibility to ¾ SM, increase LNAV Cats C/D visibility to 1¾ SM.





MISSED APPROACH:  
Climb to 2500 direct  
VUSRY and hold.

ATIS <b>134.525</b>	PENSACOLA APP CON <b>120.65 270.8</b>	GULF SHORES TOWER ★ <b>118.65 (CTAF) 1</b>	GND CON <b>121.7</b>	UNICOM <b>122.7</b>
------------------------	------------------------------------------	-----------------------------------------------	-------------------------	------------------------

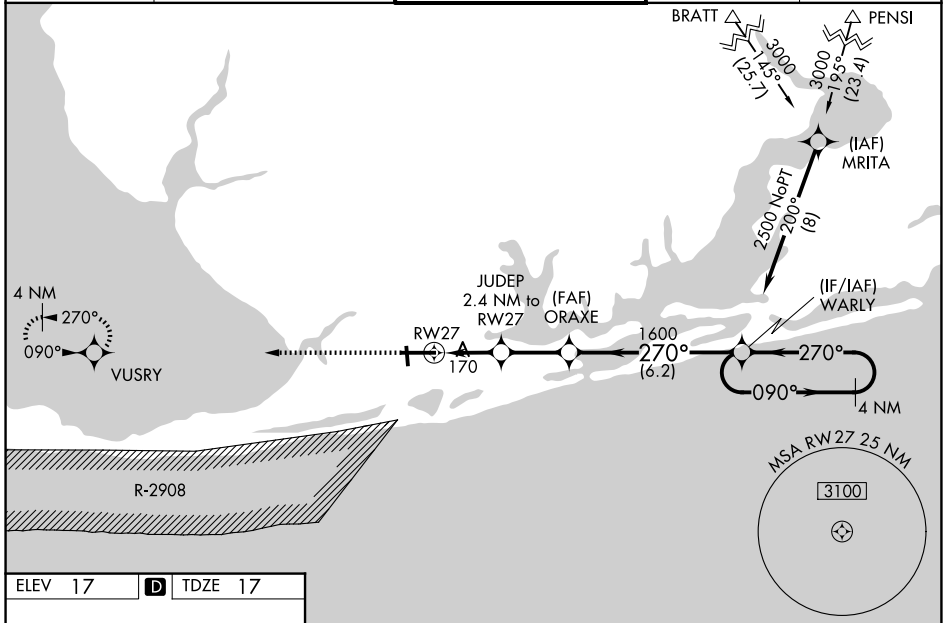

ELEV 17	<b>D</b>	TDZE 17
---------	----------	---------

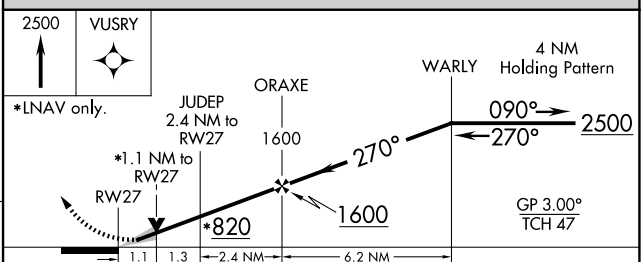

CATEGORY	A	B	C	D
LPV DA		217-½	200 (200-½)	
LNAV/VNAV DA		481-1⅞	464 (500-1⅞)	
LNAV MDA	420-½	403 (500-½)	420-¾	403 (500-¾)
CIRCLING	480-1	463 (500-1)	740-2 723 (800-2)	740-2¼ 723 (800-2¼)

SE-4, 16 APR 2026 to 14 MAY 2026

SE-4, 16 APR 2026 to 14 MAY 2026