COPTER PRIDE TWO DEPARTURE (NHU2.NHU) [USN]

Rwy	Knots	60	120	180	240	300	360
H1	V/V(fpm)	500	1000	1500	2000	2500	3000

Minimum Climb Rate to 500

RADAR required

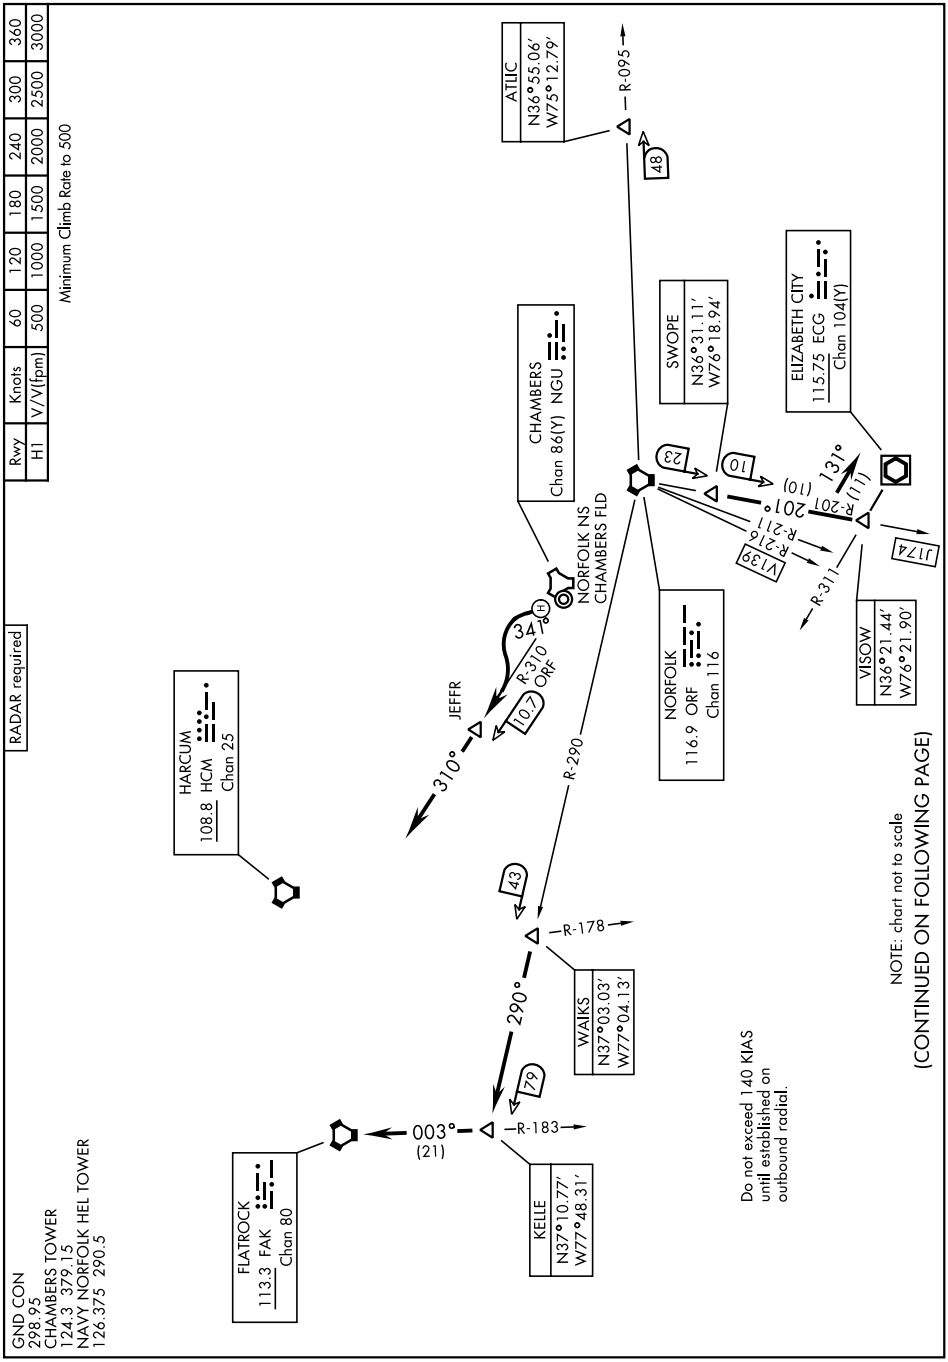

Do not exceed 140 KIAS until established on outbound radial.

NOTE: chart not to scale

(CONTINUED ON FOLLOWING PAGE)