

GLADZ FOUR DEPARTURE (RNAV) Departure Routes


SE-3, 14 MAY 2026 to 11 JUN 2026

TOP ALTITUDE:
5000

RNAV-1 DME/DME/IRU or GPS.
RADAR required for NON-GPS equipped aircraft.
RADAR required.

MIAMI DEP CON
125.5 354.1 (Departing W)
126.85 290.325 (Departing E)
D-ATIS
133.675
CUNCDL
135.35
CPDLC
GND CON
121.8 348.6 (R)/12, 261/(R)
127.5 348.6 (P, 27, 30)
MIAMI TOWER
118.3 256.9

NOTE: Jet aircraft only.
NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.
NOTE: SHAOQ and BAGGS transitions ATC assigned except aircraft departing MIA.

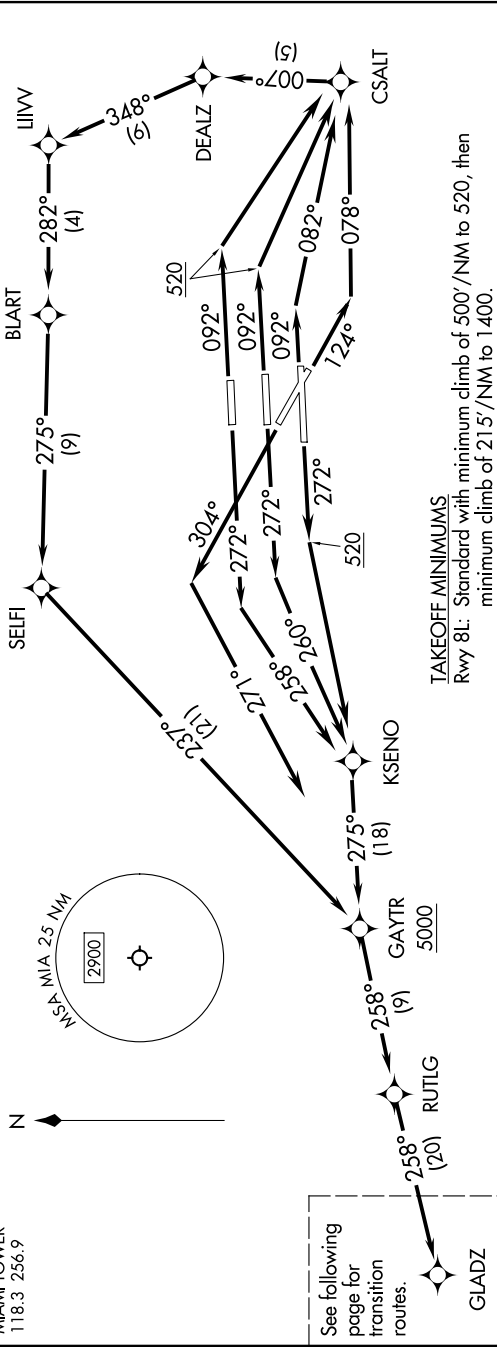

TAKEOFF MINIMUMS
 Rwy 8L: Standard with minimum climb of 500'/NM to 520, then minimum climb of 215'/NM to 1400.
 Rwy 8R: Standard with minimum climb of 500'/NM to 520, then minimum climb of 235'/NM to 1400.
 Rwy 9: Standard with minimum climb of 500'/NM to 520, then minimum climb of 240'/NM to 1400.
 Rwy 12: Standard with minimum climb of 500'/NM to 520, then minimum climb of 230'/NM to 1400.
 Rwys 26L/R, 27, 30: Standard with minimum climb of 500'/NM to 520.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SE-3, 14 MAY 2026 to 11 JUN 2026