PORTLAND TWO DEPARTURE

AL-330 (FAA)

TOP ALTITUDE: ASSIGNED BY ATC

PORTLAND DEP CON
124.35 299.2
D-ATIS
128.35 269.9
CLNC DEL
120.125 318.1
CPDLC
PORTLAND TOWER
118.7 257.8 (Rwy 10L-28R)
123.775 251.125 (Rwys 3-21, 10R-28L)

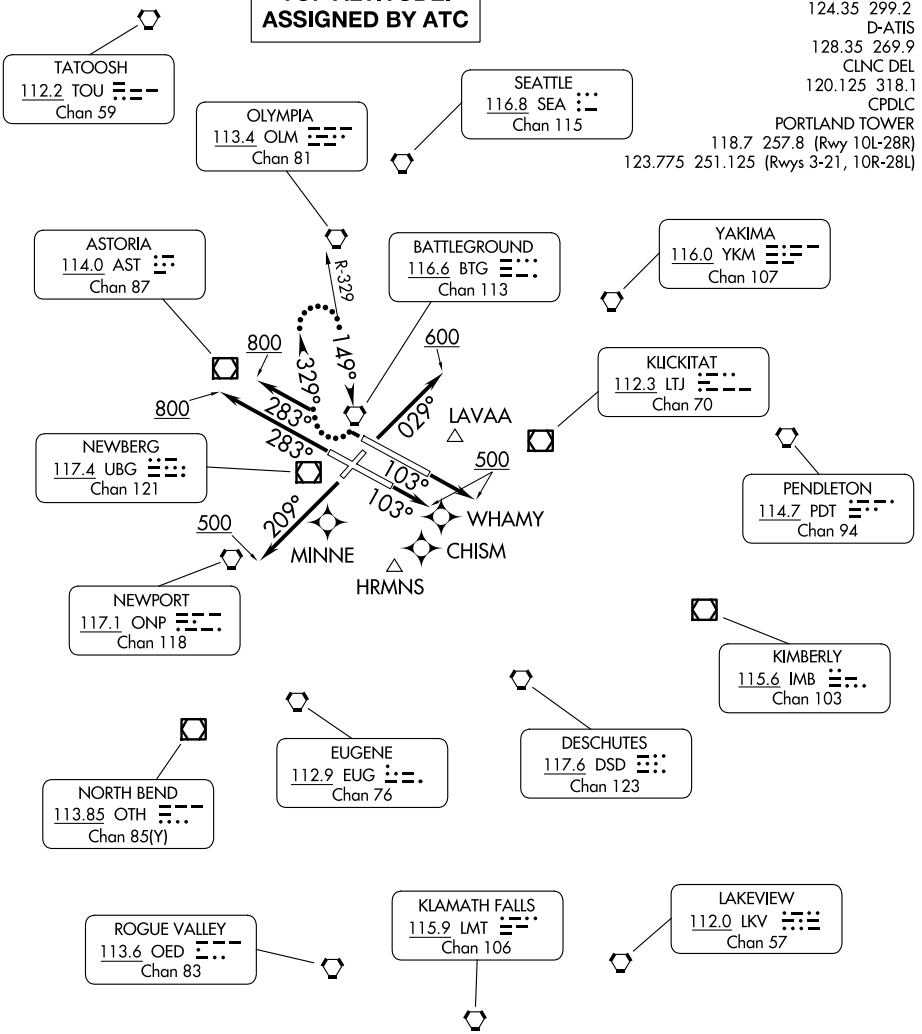

TAKEOFF MINIMUMS

Rwy 3: Standard with minimum climb of 375′ per NM to 5300.
Rwy 10L: Standard with minimum climb of 350′ per NM to 5900.
Rwy 10R: Standard with minimum climb of 400′ per NM to 5000.
Rwy 21: Standard with minimum climb of 430′ per NM to 4000.
Rwy 28L: Standard with minimum climb of 375′ per NM to 4500.
Rwy 28R: Standard with minimum climb of 340′ per NM to 5400.

NOTE: RADAR required.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)