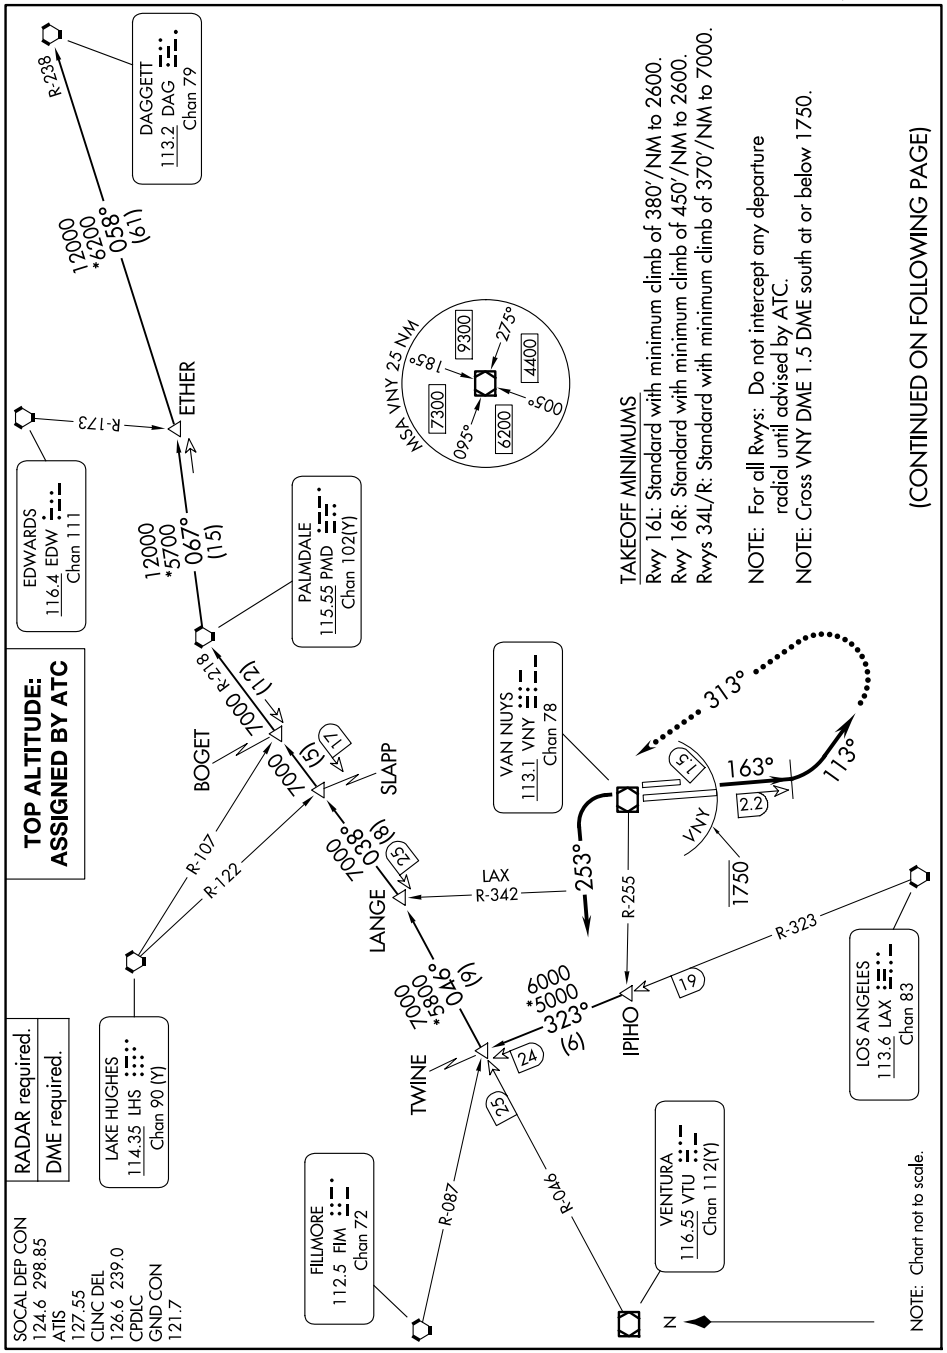
TOP ALTITUDE: ASSIGNED BY ATC
RADAR required.
DME required.
SOCAL DEP CON 124.6 298.85
ATIS 127.55
CLNC DEL 126.6 239.0
CPDLC
GND CON 121.7
LAKE HUGHES 114.35 LHS Chan 90 (Y)
EDWARDS 116.4 EDW Chan 111
DAGGETT 113.2 DAG Chan 79
PALMDALE 115.55 PMD Chan 102(Y)
VAN NUYS 113.1 VNY Chan 78
LOS ANGELES 113.6 LAX Chan 83
VENTURA 116.55 VTU Chan 112(Y)
FILLMORE 112.5 FIM Chan 72
R-238
R-173
ETHER
12000 *6200 058° (19)
12000 *5700 067° (15)
7000 R-218 (12)
BOGET
7000 (15)
SLAPP
R-107
R-122
7000 038° (8)
LANGE
LAX R-342
253°
R-255
7000 *5800 040° (9)
TWINE
6000 *5000 323° (6)
IPIHO
R-087
R-040
R-323
313°
163°
113°
VNY
1750
MSA VNY 25 NM
185°
275°
005°
060°
7300
9300
6200
4400
TAKEOFF MINIMUMS
Rwy 16L: Standard with minimum climb of 380'/NM to 2600.
Rwy 16R: Standard with minimum climb of 450'/NM to 2600.
Rwys 34L/R: Standard with minimum climb of 370'/NM to 7000.
NOTE: For all Rwys: Do not intercept any departure radial until advised by ATC.
NOTE: Cross VNY DME 1.5 DME south at or below 1750.
(CONTINUED ON FOLLOWING PAGE)
NOTE: Chart not to scale.
N