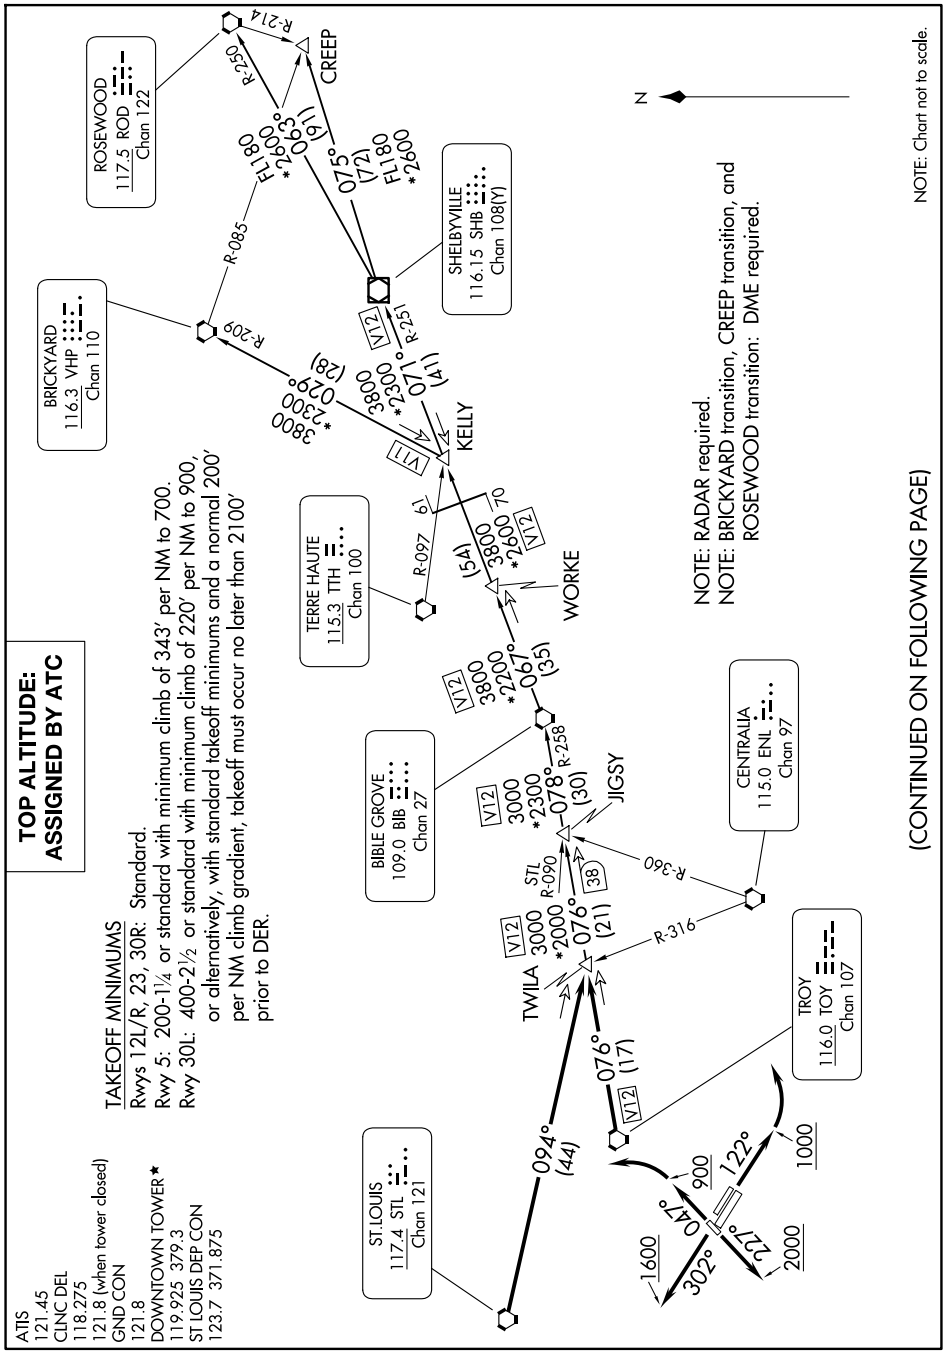
ROSEWOOD
117.5 ROD
Chan 122
BRICKYARD
116.3 VHP
Chan 110
SHELBYVILLE
116.15 SHB
Chan 108(Y)
TERRE HAUTE
115.3 TTH
Chan 100
BIBLE GROVE
109.0 BIB
Chan 27
CENTRALIA
115.0 ENL
Chan 97
TROY
116.0 TOY
Chan 107
ST.LOUIS
117.4 STL
Chan 121
CREEP
KELLY
WORKE
JIGSY
TWILA
R-214
R-250
R-085
R-209
R-251
R-097
R-258
R-090
R-360
R-316
V12
V11
STL
38
075°
(72)
FL180
*2600
063°
(91)
*2600
FL180
070°
(14)
*2300
3800
029°
(28)
*2300
3800
061°
(54)
*2200
3800
*2600
078°
(30)
3000
*2300
076°
(21)
3000
*2000
076°
(17)
094°
(44)
047°
302°
122°
227°
1600
900
2000
1000
N
NOTE: RADAR required.
NOTE: BRICKYARD transition, CREEP transition, and ROSEWOOD transition: DME required.
NOTE: Chart not to scale.
(CONTINUED ON FOLLOWING PAGE)
TOP ALTITUDE:
ASSIGNED BY ATC
TAKEOFF MINIMUMS
Rwys 12L/R, 23, 30R: Standard.
Rwy 5: 200-1¼ or standard with minimum climb of 343′ per NM to 700.
Rwy 30L: 400-2½ or standard with minimum climb of 220′ per NM to 900, or alternatively, with standard takeoff minimums and a normal 200′ per NM climb gradient, takeoff must occur no later than 2100′ prior to DER.
ATIS
121.45
CLNC DEL
118.275
121.8 (when tower closed)
GND CON
121.8
DOWNTOWN TOWER★
119.925 379.3
ST LOUIS DEP CON
123.7 371.875