



RNAV-1 DME/DME/IRU or GPS.
 RADAR required.

**TOP ALTITUDE:
 ASSIGNED BY ATC**

MIAMI DEP CON
 125.5 354.1
 ATIS
 124.0
 CLNC DEL
 133.0
 GND CON
 121.7
 MIAMI EXEC TOWER*
 118.9 (CTAF)

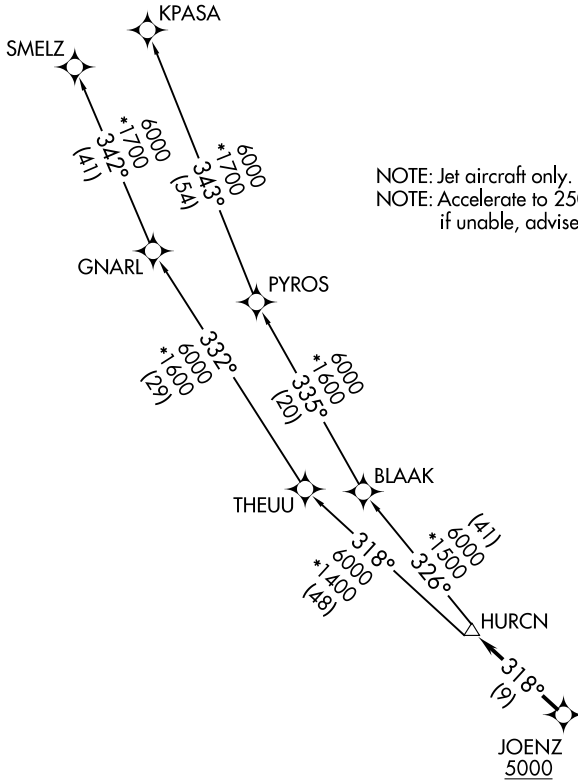


NOTE: Jet aircraft only.
 NOTE: Accelerate to 250K until leaving 10000,
 if unable, advise ATC.



TAKEOFF MINIMUMS

- Rwy 9L: Standard with minimum climb of 500'/NM to 1300.
- Rwy 9R: Standard with minimum climb of 500'/NM to 1500.
- Rwy 13: Standard with minimum climb of 500'/NM to 1800.
- Rwy 27L: Standard with minimum climb of 500'/NM to 1900.
- Rwy 27R: Standard with minimum climb of 500'/NM to 1700.
- Rwy 31: Standard with minimum climb of 500'/NM to 1400.



NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)